



Exclusive U.S. Distributor

LIST PRICE

Valid until 31/12/2023

TECHNOLOGY SERVING DESIGN



VIDEO

Motorised Monitors

DB2 [4](#)

DB2Share [7](#)

DynamicX2 & DynamicX2

UnderCover [9](#)

DynamicX2Talk [16](#)

DynamicX2KM [22](#)

Dynamic3 [24](#)

Dynamic3Talk [28](#)

Dynamic3Reverse [32](#)

Dynamic1H [34](#)

DB1Twin [37](#)

DynamicSignatureDisplay [38](#)

DynamiChairDisplay [39](#)

Dynamic4 [40](#)

DynamicReceptionMonitor [41](#)

Manual Monitors

AH1 [42](#)

AH2 [44](#)

Wall Monitors

Rise [46](#)

Drop [48](#)

Kiosks

AHPylon [50](#)

AUDIO

Microphone Solutions

DynamicTalk [51](#)

DynamicTalk UnderCover [53](#)

DynamicTalkH [55](#)

DynamicTalkB [56](#)

MicConnect [57](#)

Motorised Speakers

DynamicSpeaker [58](#)

Cameras

DynamicMCS [59](#)

Motorised covers for VC cameras

DynamicVision [60](#)

CONNECT, CONTROL & DISTRIBUTION

Courtesy Boxes

CourtesyBox [61](#)

Connect

DynamicCableRetract [62](#)

DynamicConnect [63](#)

ConnectionBox [65](#)

Setup, Control & Diagnose ERT [67](#)

Distribution

DynamicShare [68](#)

DynamicLoop [70](#)



Welcome



Arthur Holm has its origins in the Danish furniture designer Jorgen Alex Jensen who was active in the sixties and seventies. His inspiration in design and his concept of ergonomics have been continued by his family, who is the design force behind the Arthur Holm product range. Arthur Holm is the result of combining Scandinavian design tradition with Mediterranean creativity, flexibility and emotion; a wide product range built on more than 25 years of craftsmanship based on continuous development and innovation developed by broadcast electronic engineers and mechanical designers. The result; cutting edge technology with astonishing functionalities and aesthetics that have been awarded in several occasions.

Arthur Holm offers a range of ingenious products with designs based on carefully chosen quality materials and the latest technology. Products which endow meeting and conference rooms with silent, ergonomic, innovative and aesthetic solutions that integrate into the furniture, hang from the walls as works of art or are used as interactive points of information. Arthur Holm contributes to the creation of environments in which the best decisions are made and where attendants have use of the latest technology, integrated perfectly with the architectural and interior design of the surroundings.

Arthur Holm offers a selection of unique, elegant, versatile, flexible and ergonomic products that are now being used in the meeting and conference rooms, reception areas, auditorium and public zones of leading companies throughout the world. The numbers speak for themselves! We currently own 33 product patents, have presence in over 45 countries, with products and solutions in more than 25,000 installations.

We are proud to present the most complete product portfolio with many options and accessories and endless customization possibilities. Do not hesitate to contact us. We are at your entire disposal to help you with your specific projects.

Thank you very much for your continuous support.

YOUR ARTHUR HOLM TEAM

Impeccable Integration into furniture

One operation sensor on top of the aluminium housing

Front double sided anti-reflective 2 sides coating 2 mm. glass

Energy saving, low consumption video controller


AH-AMMC: Auto Mechanical Movement Calibration

Wireless connectivity for setup and control: AHlink

No cover plate required

20 mm. max thickness

DB2



reddot award 2017
winner



DB2 is a motorised retractable monitor range that creates minimum impact on the furniture's design. It is easy to integrate, intuitive to use (one simple operation sensor located on the top of the monitor) and almost invisible (no cover plate, neatly streamlined into the furniture) when not in operation. DB2 provides a harmonious silent drive with variable speeds. With a maximum thickness of 20 mm., this monitor range is elegant, beautiful from all angles and can be veneered for a seamless integration in the furniture, creating a long lasting user's experience and delivering an exceptional image's quality. The monitors are equipped with AH-AMMC: an auto mechanical movement calibration system and the use of the Arthur Holm's ERT will enable the address configuration of all the monitors installed in a table by simply pressing a button. The AHlink app allows a wireless access to the test and adjustment functions without removing the unit from the table.

MODEL	DESCRIPTION	MSRP PRICE \$
AH17DB2	HDCP compliant vertically retractable aluminium 17.3" Full HD monitor with 20 degrees of adjustable inclination. Solid aluminium monitor housing with 20 mm. of thickness featuring 2 mm. double sided anti reflective black edged glass. Allows its installation in a furniture opening of a maximum width of 24 mm. and the monitor housing is flush with the desk once in recessed position. One capacitive sensor is located on top of the aluminum frame and a second touch sensor on the screen's glass. DVI-I and DVI-D inputs, RS-422 I/O, ISD (Interactive Setup Display), USB port for firmware upgrades, AH-AMMC (Auto-mechanical movement callibration). AHlink.	3886
AH22DB2	HDCP compliant vertically retractable aluminium 21.5" Full HD monitor with 20 degrees of adjustable inclination. Solid aluminium monitor housing with 20 mm. of thickness featuring 2 mm. double sided anti reflective black edged glass. Allows its installation in a furniture opening of a maximum width of 24 mm. and the monitor housing is flush with the desk once in recessed position. One capacitive sensor is located on top of the aluminum frame and a second touch sensor on the screen's glass. DVI-I and DVI-D inputs, RS-422 I/O, ISD (Interactive Setup Display), USB port for firmware upgrades, AH-AMMC (Auto-mechanical movement callibration). AHlink.	4080
AH24DB2	HDCP compliant vertically retractable aluminium 23.8" 4 K monitor with 20 degrees of adjustable inclination. Solid aluminium monitor housing with 20 mm. of thickness featuring 2 mm. double sided anti reflective black edged glass. Allows its installation in a furniture opening of a maximum width of 24 mm. and the monitor housing is flush with the desk once in recessed position. One capacitive sensor is located on top of the aluminum frame and a second touch sensor on the screen's glass. 1/VGA, 2/DisplayPort, 2/HDMI inputs, RS-422 I/O, ISD (Interactive Setup Display), USB port for firmware upgrades, AH-AMMC (Auto-mechanical movement callibration). AHlink.	5486

Impeccable Integration into furniture

One operation sensor on top of the aluminium housing

*Front double sided anti-reflective 2 sides coating
2 mm. glass*

Energy saving, low consumption video controller


AH-AMMC: Auto Mechanical Movement Calibration

Wireless connectivity for setup and control: AHlink

No cover plate required

20 mm. max thickness

DB2



reddot award 2017
winner



For custom options, special features and optional accessories, please see below.

AH17DB2	AH22DB2	AH24DB2
TS17DB2 Projected capacitive multi-touch screen	TS22DB2 Projected capacitive multi-touch screen	
CABDB2 (Min. 10 units) Black anodised	CABDB2 (Min. 10 units) Black anodised	CAB (Min. 10 units) Black anodised
GFDB2 (Min. 10 units) Gold finish	GFDB2 (Min. 10 units) Gold finish	GFDB2 (Min. 10 units) Gold finish
BFDB2 (Min. 10 units) Bronze finish	BFDB2 (Min. 10 units) Bronze finish	BFDB2 (Min. 10 units) Bronze finish
CPDB2 (Min. 10 units) Painted	CPDB2 (Min. 10 units) Painted	CPDB2 (Min. 10 units) Painted
ACP (Min. 10 units) Aluminium cover plate	ACP (Min. 10 units) Aluminium cover plate	ACP (Min. 10 units) Aluminium cover plate
AHDL DynamicLoop	AHDL DynamicLoop	AHDL DynamicLoop
UCSDB2 (Min. 10 units) Stainless steel UnderCover	UCSDB2 (Min. 10 units) Stainless steel UnderCover	UCSDB2 (Min. 10 units) Stainless steel UnderCover
UCVDB2 (Min. 10 units) UnderCover for veneering	UCVDB2 (Min. 10 units) UnderCover for veneering	UCVDB2 (Min. 10 units) UnderCover for veneering
HDMIMIP 2x HDMI main inputs	HDMIMIP 2x HDMI main inputs	HDMIMIP 2x HDMI main inputs



OPTIONS & ACCESSORIES

MODEL	ACCESSORIES & OPTIONS	MSRP PRICE \$
TS17DB2	Projected capacitive multi-touch screen for AH17DB2.	915
TS22DB2	Projected capacitive multi-touch screen for AH22DB2.	972
CABDB2	Anodised in black.	378
GFDB2	Gold finish.	400
BFDB2	Bronze finish.	400
CPDB2	Painted.	246
ACP	Aluminium cover plate.	143
AHDL	DynamicLoop allows the daisy chain of an HDMI signal. This board is internally integrated so no additional power supplies are needed and it provides HDMI I/O. The loop doesn't need to be closed. A Maximum of 20 units can be daisy chained at Full HD resolution with maximum 40 meters of cables in total (no cable in the chain should exceed 2 meters, it is always recommended to use 4K cables; and always use the shortest possible).	503
UCSDB2	UnderCover with stainless steel veneer.	1086
UCVDB2	UnderCover ready to be veneered.	943
HDMIMIP	2x HDMI main inputs.	69



Impeccable Integration into furniture

Includes a retractable HDMI cable and on glass buttons

Front double sided anti-reflective 2 sides coating 2 mm. glass

Energy saving, low consumption video controller


AH-AMMC: Auto Mechanical Movement Calibration

Wireless connectivity for setup and control: AHlink

No cover plate required

20 mm. max thickness

DB2Share



DB2 Share is a motorised retractable communication solution that creates minimum impact on the furniture's design. It is easy to integrate, intuitive to use (one simple operation sensor located on the top of the monitor) and almost invisible (no cover plate, neatly streamlined into the furniture) when not in operation. This solution provides full control to view and share documents and videos with a motorised retractable HDMI cable that raises as an extension of the slick design of the monitor.

By touching directly on the monitor, users can select the HDMI input and share it. Monitors are equipped with 2 HDMI-HDCP compliant inputs and 1 output, allowing the daisy chain of a maximum of 20 devices.

MODEL	DESCRIPTION	MSRP PRICE \$
AH17DB2Share	HDCP compliant vertically retractable aluminium 17.3" Full HD monitor with 20 degrees of adjustable inclination. The monitor allows its installation flush with the desk when the monitor is in recessed position and a motorised retractable HDMI cable rises as an extension of the monitor. Monitors are equipped with 2 HDMI-HDCP compliant inputs and 1 output, allowing the daisy chain of a maximum of 20 devices. It provides full control to view and share HDMI signals by pushing the touch buttons integrated on the glass of the screen, below the viewing area. AHlink.	5629
AH22DB2Share	HDCP compliant vertically retractable aluminium 21.5" Full HD monitor with 20 degrees of adjustable inclination. The monitor allows its installation flush with the desk when the monitor is in recessed position and a motorised retractable HDMI cable rises as an extension of the monitor. Monitors are equipped with 2 HDMI-HDCP compliant inputs and 1 output, allowing the daisy chain of a maximum of 20 devices. It provides full control to view and share HDMI signals by pushing the touch buttons integrated on the glass of the screen, below the viewing area. AHlink.	5823

For custom options, special features and optional accessories, please see below.

AH17DB2Share	AH22DB2Share
TS17DB2 Projected capacitive multi-touch screen	TS22DB2 Projected capacitive multi-touch screen
CABDB2S (Min. 10 units) Black anodised	CABDB2 (Min. 10 units) Black anodised
GFDB2S (Min. 10 units) Gold finish	GFDB2 ((Min. 10 units) Gold finish
BFDB2S (Min. 10 units) Bronze finish	BFDB2 (Min. 10 units) Bronze finish
CPDB2S (Min. 10 units) Painted	CPDB2 (Min. 10 units) Painted
ACPS Aluminium cover plate	ACPS Aluminium cover plate



MODEL	ACCESSORIES & OPTIONS	MSRP PRICE \$
TS17DB2	Projected capacitive multi-touch screen for AH17DB2Share.	915
TS22DB2	Projected capacitive multi-touch screen for AH22DB2Share.	972
CABDB2S	Anodised in black.	412
GFDB2S	Gold finish.	435
BFDB2S	Bronze finish.	435
CPDB2S	Painted.	280
ACPS	Aluminium cover plate.	160



Patented single engine mechanism for up/down and tilt movements

Automatic 20° tilt angle

Milled aluminium housing with a contemporary design


Stainless steel customisable cover plate

Front double sided anti-reflecting 2 sides coating 3 mm. black edged glass

Wireless connectivity for setup and control: AHlink
AH-AMMC Auto Mechanical Movement

DynamicX2

DynamicX2 UnderCover



DynamicX2 is a motorised retractable product range that provides silent, reliable and harmonic movements using a patented solution with just a single engine. DynamicX2 is equipped with a variable speed system to raise, lower and tilt 20° to ensure the best ergonomics, viewing angle and visibility. DynamicX2 have slightly curved edges for a contemporary and longstanding look and the screen is protected with an anti-reflective 2-side coating 3 mm. black edged glass.


The stainless steel cover plate can be customised with different connectors, retractable cable and fixed or monitored microphones as well as other features.

MODEL	DESCRIPTION	MSRP PRICE \$
AH15DX2HDGA	HDCP compliant vertically retractable aluminium 15.6" Full HD monitor with 20 degrees of automatic inclination. Single engine patented mechanism. Solid aluminium monitor in natural anodisation finish featuring 3 mm. double sided anti reflective black edged glass. Up-table cover plate made of brushed stainless steel with 2 push buttons. DVI-I and DVI-D inputs. Interactive Setup Display allowing the control, setup and diagnose of the monitors. Monitors provide RS-422 I/O allowing the remote control of movements, speeds, safety settings, brightness, contrast and backlight. The monitors are equipped with AH-AMMC: an auto mechanical movement calibration system. AHlink.	3520
AH17DX2HDGA	HDCP compliant vertically retractable aluminium 17.3" Full HD monitor with 20 degrees of automatic inclination. Single engine patented mechanism. Solid aluminium monitor in natural anodisation finish featuring 3 mm. double sided anti reflective black edged glass. Up-table cover plate made of brushed stainless steel with 2 push buttons. DVI-I and DVI-D inputs. Interactive Setup Display allowing the control, setup and diagnose of the monitors. Monitors provide RS-422 I/O allowing the remote control of movements, speeds, safety settings, brightness, contrast and backlight. The monitors are equipped with AH-AMMC: an auto mechanical movement calibration system. AHlink.	3886
AH19DX2HDGA	HDCP compliant vertically retractable aluminium 18.5" Full HD monitor with 20 degrees of automatic inclination. Single engine patented mechanism. Solid aluminium monitor in natural anodisation finish featuring 3 mm. double sided anti reflective black edged glass. Up-table cover plate made of brushed stainless steel with 2 push buttons. DVI-I and DVI-D inputs. Interactive Setup Display allowing the control, setup and diagnose of the monitors. Monitors provide RS-422 I/O allowing the remote control of movements, speeds, safety settings, brightness, contrast and backlight. The monitors are equipped with AH-AMMC: an auto mechanical movement calibration system. AHlink.	4000

5 years limited warranty
Automatic 20° tilt
Optionally adjustable tilting angle from 0° to 20°
Interactive setup display
Maintenance free
HDCP compliant
Security system
Energy saving design
Serial control & Remote diagnose
AH-AMMC Auto Mechanical Movement
Wireless connectivity for setup and control: AHlink

DynamicX2

DynamicX2 UnderCover



MODEL	DESCRIPTION	MSRP PRICE \$
AH22DX216GA	HDCP compliant vertically retractable aluminium 21.5" Full HD monitor with 20 degrees of automatic inclination. Single engine patented mechanism. Solid aluminium monitor in natural anodisation finish featuring 3 mm. double sided anti reflective black edged glass. Up-table cover plate made of brushed stainless steel with 2 push buttons. DVI-I and DVI-D inputs. Interactive Setup Display allowing the control, setup and diagnose of the monitors. Monitors provide RS-422 I/O allowing the remote control of movements, speeds, safety settings, brightness, contrast and backlight. The monitors are equipped with AH-AMMC: an auto mechanical movement calibration system. AHlink.	4080
AH24DX24KGA	HDCP compliant vertically retractable aluminium 23.8" 4 K monitor with 20 degrees of automatic inclination. Single engine patented mechanism. Solid aluminium monitor in natural anodisation finish featuring 3 mm. double sided anti reflective black edged glass. Up-table cover plate made of brushed stainless steel with 2 push buttons. 1/VGA, 2/ DisplayPort, 2/HDMI inputs. Interactive Setup Display allowing the control, setup and diagnose of the monitors. Monitors provide RS-422 I/O allowing the remote control of movements, speeds, safety settings, brightness, contrast and backlight. The monitors are equipped with AH-AMMC: an auto mechanical movement calibration system. AHlink.	5486



5 years limited warranty

Automatic 20° tilt

Optionally adjustable tilting angle from 0° to 20°

Interactive setup display

Maintenance free

HDCP compliant

Security system

Energy saving design


Serial control & Remote diagnose

AH-AMMC Auto Mechanical Movement

Wireless connectivity for setup and control: AHlink

DynamicX2

DynamicX2 UnderCover



For custom options, special features and optional accessories, please see below.

AH15DX2HDGA	AH17DX2HDGA	AH19DX2HDGA	AH22DX216GA	AH24DX24KGA
CL (Min. 5 units) Laser engraved logo	CL (Min. 5 units) Laser engraved logo	CL (Min. 5 units) Laser engraved logo	CL (Min. 5 units) Laser engraved logo	CL (Min. 5 units) Laser engraved logo
UCS (Min. 10 units) UnderCover Stainless steel	UCS (Min. 10 units) UnderCover Stainless steel	UCS (Min. 10 units) UnderCover Stainless steel	UCS (Min. 10 units) UnderCover Stainless steel	UCS (Min. 10 units) UnderCover Stainless steel
UCV (Min. 10 units) UnderCover for veneer	UCV (Min. 10 units) UnderCover for veneer	UCV (Min. 10 units) UnderCover for veneer	UCV (Min. 10 units) UnderCover for veneer	UCV (Min. 10 units) UnderCover for veneer
TSV Touch sensor for UnderCover	TSV Touch sensor for UnderCover	TSV Touch sensor for UnderCover	TSV Touch sensor for UnderCover	TSV Touch sensor for UnderCover
AHTECB2 GPI remote control interface	AHTECB2 GPI remote control interface	AHTECB2 GPI remote control interface	AHTECB2 GPI remote control interface	AHTECB2 GPI remote control interface
UI (Min. 10 units) Underneath installation	UI (Min. 10 units) Underneath installation	UI (Min. 10 units) Underneath installation	UI (Min. 10 units) Underneath installation	UI (Min. 10 units) Underneath installation
MCDX2 (Min. 10 units) Matte cover plate	MCDX2 (Min. 10 units) Matte cover plate	MCDX2 (Min. 10 units) Matte cover plate	MCDX2 (Min. 10 units) Matte cover plate	MCDX2 (Min. 10 units) Matte cover plate
TS150HDG Projected capacitive multi-touch screen	TS170HDG Projected capacitive multi-touch screen	TS190HDG Projected capacitive multi-touch screen	TS2216G Projected capacitive multi-touch screen	
USBCOTDX2 (Min. 10 units) USB camera added to aluminium housing	USBCOTDX2 (Min. 10 units) USB camera added to aluminium housing	USBCOTDX2 (Min. 10 units) USB camera added to aluminium housing	USBCOTDX2 (Min. 10 units) USB camera added to aluminium housing	USBCOTDX2 (Min. 10 units) USB camera added to aluminium housing
HDSDICOTDX2 (Min. 10 units) HD-SDI camera added to aluminium housing	HDSDICOTDX2 (Min. 10 units) HD-SDI camera added to aluminium housing	HDSDICOTDX2 (Min. 10 units) HD-SDI camera added to aluminium housing	HDSDICOTDX2 (Min. 10 units) HD-SDI camera added to aluminium housing	HDSDICOTDX2 (Min. 10 units) HD-SDI camera added to aluminium housing
USBCFDX2 (Min. 10 units) USB camera integrated in an aluminium frame	USBCFDX2 (Min. 10 units) USB camera integrated in an aluminium frame	USBCFDX2 (Min. 10 units) USB camera integrated in an aluminium frame	USBCFDX2 (Min. 10 units) USB camera integrated in an aluminium frame	USBCFDX2 (Min. 10 units) USB camera integrated in an aluminium frame
HDSDICFDX2 (Min. 10 units) HD-SDI camera integrated in an aluminium frame	HDSDICFDX2 (Min. 10 units) HD-SDI camera integrated in an aluminium frame	HDSDICFDX2 (Min. 10 units) HD-SDI camera integrated in an aluminium frame	HDSDICFDX2 (Min. 10 units) HD-SDI camera integrated in an aluminium frame	HDSDICFDX2 (Min. 10 units) HD-SDI camera integrated in an aluminium frame
DTalk DynamicTalkM	DTalk DynamicTalkM	DTalk DynamicTalkM	DTalk DynamicTalkM	DTalk DynamicTalkM

5 years limited warranty

Automatic 20° tilt

Optionally adjustable tilting angle from 0° to 20°

Interactive setup display

Maintenance free

HDCP compliant

Security system

Energy saving design


Serial control & Remote diagnose

AH-AMMC Auto Mechanical Movement

Wireless connectivity for setup and control: AHlink

DynamicX2

DynamicX2 UnderCover



For custom options, special features and optional accessories, please see below.

AH15DX2HDGA	AH17DX2HDGA	AH19DX2HDGA	AH22DX216GA	AH24DX24KGA
EMM (Min. 10 units) For 1 syncro mic (XLR 3 Pin)	EMM (Min. 10 units) For 1 syncro mic (XLR 3 Pin)	EMM (Min. 10 units) For 1 syncro mic (XLR 3 Pin)	EMM (Min. 10 units) For 1 syncro mic (XLR 3 Pin)	EMM (Min. 10 units) For 1 syncro mic (XLR 3 Pin)
2EMM (Min. 10 units) For 2 syncro mics (XLR 3 Pin)	2EMM (Min. 10 units) For 2 syncro mics (XLR 3 Pin)	2EMM (Min. 10 units) For 2 syncro mics (XLR 3 Pin)	2EMM (Min. 10 units) For 2 syncro mics (XLR 3 Pin)	2EMM (Min. 10 units) For 2 syncro mics (XLR 3 Pin)
CCUSB USB passthrough	CCUSB USB passthrough	CCUSB USB passthrough	CCUSB USB passthrough	CCUSB USB passthrough
CC2USB 2 USB passthroughs	CC2USB 2 USB passthroughs	CC2USB 2 USB passthroughs	CC2USB 2 USB passthroughs	CC2USB 2 USB passthroughs
CCUSBPower USB power	CCUSBPower USB power	CCUSBPower USB power	CCUSBPower USB power	CCUSBPower USB power
FB Free button (GPO)	FB Free button (GPO)	FB Free button (GPO)	FB Free button (GPO)	FB Free button (GPO)
PO AC Power outlet	PO AC Power outlet	PO AC Power outlet	PO AC Power outlet	PO AC Power outlet
AJ Audio mini-jack	AJ Audio mini-jack	AJ Audio mini-jack	AJ Audio mini-jack	AJ Audio mini-jack
VGACP VGA passthrough	VGACP VGA passthrough	VGACP VGA passthrough	VGACP VGA passthrough	VGACP VGA passthrough
HDMICP HDMI passthrough	HDMICP HDMI passthrough	HDMICP HDMI passthrough	HDMICP HDMI passthrough	HDMICP HDMI passthrough
AHISBD2PT HDMI retractable passthrough	AHISBD2PT HDMI retractable passthrough	AHISBD2PT HDMI retractable passthrough	AHISBD2PT HDMI retractable passthrough	AHISBD2PT HDMI retractable passthrough
DPCP DisplayPort connector	DPCP DisplayPort connector	DPCP DisplayPort connector	DPCP DisplayPort connector	DPCP DisplayPort connector
RJ45CP RJ45 connector	RJ45CP RJ45 connector	RJ45CP RJ45 connector	RJ45CP RJ45 connector	RJ45CP RJ45 connector
CCXLR3P 3 pin XLR connector	CCXLR3P 3 pin XLR connector	CCXLR3P 3 pin XLR connector	CCXLR3P 3 pin XLR connector	CCXLR3P 3 pin XLR connector
CCSPKD2 2" , 15W, 8 Ohm passive loudspeaker	CCSPKD2 2" , 15W, 8 Ohm passive loudspeaker	CCSPKD2 2" , 15W, 8 Ohm passive loudspeaker	CCSPKD2 2" , 15W, 8 Ohm passive loudspeaker	CCSPKD2 2" , 15W, 8 Ohm passive loudspeaker
HDMIMIP 2x HDMI main inputs	HDMIMIP 2x HDMI main inputs	HDMIMIP 2x HDMI main inputs	HDMIMIP 2x HDMI main inputs	HDMIMIP 2x HDMI main inputs
CABD2 (Min. 10 units) Black anodised	CABD2 (Min. 10 units) Black anodised	CABD2 (Min. 10 units) Black anodised	CABD2 (Min. 10 units) Black anodised	CABD2 (Min. 10 units) Black anodised

5 years limited warranty

Automatic 20° tilt

Optionally adjustable tilting angle from 0° to 20°

Interactive setup display

Maintenance free

HDCP compliant

Security system

Energy saving design


Serial control & Remote diagnose

AH-AMMC Auto Mechanical Movement

Wireless connectivity for setup and control: AHlink

DynamicX2

DynamicX2 UnderCover



AH15DX2HDGA	AH17DX2HDGA	AH19DX2HDGA	AH22DX216GA	AH24DX24KGA
GFD2 (Min. 10 units) Gold finish	GFD2 (Min. 10 units) Gold finish	GFD2 (Min. 10 units) Gold finish	GFD2 (Min. 10 units) Gold finish	GFD2 (Min. 10 units) Gold finish
BFD2 (Min. 10 units) Bronze finish	BFD2 (Min. 10 units) Bronze finish	BFD2 (Min. 10 units) Bronze finish	BFD2 (Min. 10 units) Bronze finish	BFD2 (Min. 10 units) Bronze finish
CPD2 (Min. 10 units) Painted	CPD2 (Min. 10 units) Painted	CPD2 (Min. 10 units) Painted	CPD2 (Min. 10 units) Painted	CPD2 (Min. 10 units) Painted
AHDL DynamicLoop	AHDL DynamicLoop	AHDL DynamicLoop	AHDL DynamicLoop	AHDL DynamicLoop
AHDSS DynamicShare	AHDSS DynamicShare	AHDSS DynamicShare	AHDSS DynamicShare	AHDL DynamicLoop
AHISBD2 HDMI retractable (Share)	AHISBD2 HDMI retractable (Share)	AHISBD2 HDMI retractable (Share)	AHISBD2 HDMI retractable (Share)	AHDL DynamicLoop
AHHC HDMI fixed (Share)	AHHC HDMI fixed (Share)	AHHC HDMI fixed (Share)	AHHC HDMI fixed (Share)	AHDL DynamicLoop
AHDSPB Priority	AHDSPB Priority	AHDSPB Priority	AHDSPB Priority	AHDL DynamicLoop
AHBTEK Transmitter and receiver	AHBTEK Transmitter and receiver	AHBTEK Transmitter and receiver	AHBTEK Transmitter and receiver	AHBTEK Transmitter and receiver

DynamicX2 / DynamicX2 UnderCover

OPTIONS & ACCESSORIES



MODEL	ACCESSORIES & OPTIONS	MSRP PRICE \$
CL	Customised laser-engraved logotype on the cover plate.	86
UCS	UnderCover with stainless steel veneer.	1086
UCV	UnderCover ready to be veneered.	943
TSV	Touch sensor for UCV. The veneer material cannot be conductive.	206
AHTECB2	Box with a GPI remote control interface with 2 buttons (open/close) and 2 meter cable.	138
UI	Prepared for underneath installation, cover plate prepared to be veneered.	0
MCDX2	Matte cover plate.	172
TS150HDG	Projected capacitive multi-touch screen for AH15DX2HDGA.	755
TS170HDG	Projected capacitive multi-touch screen for AH17DX2HDGA.	800
TS190HDG	Projected capacitive multi-touch screen for AH19DX2HDGA.	800
TS2216G	Projected capacitive multi-touch screen for AH22DX216GA.	858
USBCOTDX2	USB camera added to the aluminium housing above the LCD display in a black nylon 12 camera housing.	858
HDSDICOTDX2	HD-SDI camera added to the aluminium housing above the LCD display in a black nylon 12 camera housing.	1029
USBCFDX2	USB camera integrated in a frame above the LCD display.	1086
HDSDICFDX2	HD-SDI camera integrated in a frame above the LCD display.	1200
DTalk	DynamicTalk built-in the cover plate.	1429
EMM	Motorised retractable synchronised single microphone system with a maximum length of 31 cm.	686
2EMM	Motorised retractable synchronised dual microphone system with a maximum length of 31 cm.	915
CCUSB	Integrated USB pass-through on the cover plate.	172
CC2USB	2 Integrated USB pass-throughs on the cover plate.	218
CCUSBPower	Integrated USB power on the cover plate.	206
FB	Integrated free button on the cover plate.	252
PO	Integrated power outlet on the cover plate.	309
AJ	Audio mini-jack on the cover plate.	126
VGACP	VGA connector pass-through on the cover plate.	172
HDMICP	HDMI connector on the cover plate.	172
AHISBD2PT	HDMI retractable cable integrated in the cover plate with output at the bottom.	915

DynamicX2 / DynamicX2 UnderCover

OPTIONS & ACCESSORIES



MODEL	ACCESSORIES & OPTIONS	MSRP PRICE \$
DPCP	Display port connector on the cover plate.	126
RJ45CP	RJ45 connector on the cover plate.	126
CCXLR3P	3 pin XLR connector on the cover plate.	172
CCSPKD2	Passive speaker on the cover plate.	229
HDMIMIP	2x HDMI main inputs	69
CABD2	Anodised in black.	458
GFD2	Gold finish.	800
BFD2	Bronze finish.	800
CPD2	Painted.	286
AHDL	DynamicLoop allows the daisy chain of tan HDMI signal. This board is internally integrated so no additional power supplies are needed and it provides HDMI I/O. The loop doesn't need to be closed. A Maximum of 20 units can be daisy chained at Full HD resolution with maximum 40 meters of cables in total (no cable in the chain should exceed 5 meters, it is always recommended to use 4K cables; and always use the shortest possible).	503
AHDSS	DynamicShare allows the daisy chain of HDMI signals, the input selection, the share and the control (AHnet). This board is integrated in the monitor so neither additional power supplies nor additional devices are needed. The loop needs to be closed (ring loop). A Maximum of 20 units can be daisy chained at Full HD resolution with maximum 40 meters of cables in total (no cable in the chain should exceed 2 meters. It is always recommended to use 4 K cables; and always use the shortest possible. An extender kit is needed when the distance between the first and the last monitor is longer than 5 meters.	686
AHISBD2	HDMI retractable cable integrated into the monitor's cover plate allowing users to share one input to the rest of devices connected by DynamicShare.	915
AHHC	Fixed HDMI connector integrated into the monitor's cover plate allowing users to share this input to the rest of devices connected by DynamicShare. HD-SDI camera integrated in a frame above the LCD display.	160
AHDSPB	Priority button integrated on the monitor's cover plate that can lock other user's share function. Only one priority button can be assembled on the system.	52
AHBTEK	Kit that comprises one transmitter and one receiver to extend the HDMI connection above 5 meters from the first to the last unit in the loop.	515



Aluminium retractable monitor with an independent microphone lift

Stainless steel cover plate

Wireless connectivity for setup and control: AHlink

Monitor:

Patented single engine mechanism for up/down and tilt movements

Automatic 20 ° tilt angle

Milled aluminium housing with a contemporary design

Front double sided anti-reflecting 2 sides coating 3

mm black edged glass

Microphone's lift system:


Microphone lift compatible with 3 Pin XLR 500 mm gooseneck microphones

Patented 360 ° LED lighting ring to indicate microphone status

PA and Conference working modes

Available customisations with conference brands

DynamicX2Talk



DynamicX2Talk is a motorised retractable monitor that includes an independent lift for gooseneck microphones. The system provides silent, reliable and harmonic movements using a patented solution with one only engine. The variable speed system raises, lowers and tilts the monitor 20° to ensure the best ergonomics, viewing angle and visibility. The integrated independent lift system for microphones provides a rounded microphone coverlid and it not only makes the microphone disappear within the desk surface, but it also provides a pleasant light to indicate its status. Thanks to its protective and patented lighting ring, the microphones can be safely stored and protected making meeting and conference spaces more flexible and versatile.

This system has two different working modes: PA and Conference. In PA mode, a push button activates and de-activates the microphone and the LED ring will show the status by changing colour from red to green. The system will automatically silence the microphone when retracting. In Conference model, the microphone will be always active.

- Please, note that the microphone is not included.
- Please, note that we offer customisations with audio conference brands.

MODEL	DESCRIPTION	MSRP PRICE \$
AH15DX2HDGATalk	HDCP compliant vertically retractable aluminium 15.6" Full HD monitor with 20 degrees of automatic inclination with an independent lift for "gooseneck" microphones. Single engine patented mechanism. Solid aluminium monitor in natural anodisation finish featuring 3 mm. double sided anti reflective black edged glass. Up-table cover plate made of brushed stainless steel integrating a rounded microphone coverlid. The system provides a patented 360° LED lighting to indicate microphone status. AHlink.	4949
AH17DX2HDGATalk	HDCP compliant vertically retractable aluminium 17.3" Full HD monitor with 20 degrees of automatic inclination with an independent lift for "gooseneck" microphones. Single engine patented mechanism. Solid aluminium monitor in natural anodisation finish featuring 3 mm. double sided anti reflective black edged glass. Up-table cover plate made of brushed stainless steel integrating a rounded microphone coverlid. The system provides a patented 360° LED lighting to indicate microphone status. AHlink.	5315
AH19DX2HDGATalk	HDCP compliant vertically retractable aluminium 18.5" Full HD monitor with 20 degrees of automatic inclination with an independent lift for "gooseneck" microphones. Single engine patented mechanism. Solid aluminium monitor in natural anodisation finish featuring 3 mm. double sided anti reflective black edged glass. Up-table cover plate made of brushed stainless steel integrating a rounded microphone coverlid. The system provides a patented 360° LED lighting to indicate microphone status. AHlink.	5429
AH22DX216GATalk	HDCP compliant vertically retractable aluminium 21.5" Full HD monitor with 20 degrees of automatic inclination with an independent lift for "gooseneck" microphones. Single engine patented mechanism. Solid aluminium monitor in natural anodisation finish featuring 3 mm. double sided anti reflective black edged glass. Up-table cover plate made of brushed stainless steel integrating a rounded microphone coverlid. The system provides a patented 360° LED lighting to indicate microphone status. AHlink.	5509



Aluminium retractable monitor with an independent microphone lift
Stainless steel cover plate
Wireless connectivity for setup and control: AHlink.


Monitor:

Patented single engine mechanism for up/down and tilt movements
Automatic 20 ° tilt angle
Milled aluminium housing with a contemporary design
Front double sided anti-reflecting 2 sides coating 3 mm. black edged glass

Microphone's lift system:

Microphone lift compatible with 3 Pin XLR 500 mm gooseneck microphones
Patented 360 ° LED lighting ring to indicate microphone status
PA and Conference working modes
Available customisations with conference brands

Dynamic X2Talk



For custom options, special features and optional accessories, please see below.



AH15DX2HDGA	AH17DX2HDGA	AH19DX2HDGA	AH22DX216GA
CL (Min. 5 units) Laser engraved logo	CL (Min. 5 units) Laser engraved logo	CL (Min. 5 units) Laser engraved logo	CL (Min. 5 units) Laser engraved logo
UCS (Min. 10 units) UnderCover Stainless steel	UCS (Min. 10 units) UnderCover Stainless steel	UCS (Min. 10 units) UnderCover Stainless steel	UCS (Min. 10 units) UnderCover Stainless steel
UCV (Min. 10 units) UnderCover for veneer	UCV (Min. 10 units) UnderCover for veneer	UCV (Min. 10 units) UnderCover for veneer	UCV (Min. 10 units) UnderCover for veneer
TSV Touch sensor for UnderCover	TSV Touch sensor for UnderCover	TSV Touch sensor for UnderCover	TSV Touch sensor for UnderCover
AHTECB2 GPI remote control interface	AHTECB2 GPI remote control interface	AHTECB2 GPI remote control interface	AHTECB2 GPI remote control interface
MCDX2T (Min. 10 units) Matte cover plate	MCDX2T (Min. 10 units) Matte cover plate	MCDX2T (Min. 10 units) Matte cover plate	MCDX2T (Min. 10 units) Matte cover plate
TS150HDG Projected capacitive multi-touch screen	TS170HDG Projected capacitive multi-touch screen	TS190HDG Projected capacitive multi-touch screen	TS2216G Projected capacitive multi-touch screen
USBCOTDX2 (Min. 10 units) USB camera added to aluminium housing	USBCOTDX2 (Min. 10 units) USB camera added to aluminium housing	USBCOTDX2 (Min. 10 units) USB camera added to aluminium housing	USBCOTDX2 (Min. 10 units) USB camera added to aluminium housing
HDSDICOTDX2 (Min. 10 units) HD-SDI camera added to aluminium housing	HDSDICOTDX2 (Min. 10 units) HD-SDI camera added to aluminium housing	HDSDICOTDX2 (Min. 10 units) HD-SDI camera added to aluminium housing	HDSDICOTDX2 (Min. 10 units) HD-SDI camera added to aluminium housing
USBCFDX2 (Min. 10 units) USB camera integrated in an aluminium frame	USBCFDX2 (Min. 10 units) USB camera integrated in an aluminium frame	USBCFDX2 (Min. 10 units) USB camera integrated in an aluminium frame	USBCFDX2 (Min. 10 units) USB camera integrated in an aluminium frame
HDSDICFDX2 (Min. 10 units) HD-SDI camera integrated in an aluminium frame	HDSDICFDX2 (Min. 10 units) HD-SDI camera integrated in an aluminium frame	HDSDICFDX2 (Min. 10 units) HD-SDI camera integrated in an aluminium frame	HDSDICFDX2 (Min. 10 units) HD-SDI camera integrated in an aluminium frame
CCUSB USB passthrough	CCUSB USB passthrough	CCUSB USB passthrough	CCUSB USB passthrough
CC2USB 2 USB passthroughs	CC2USB 2 USB passthroughs	CC2USB 2 USB passthroughs	CC2USB 2 USB passthroughs
CCUSBPower USB power	CCUSBPower USB power	CCUSBPower USB power	CCUSBPower USB power

Aluminium retractable monitor with an independent microphone lift
Stainless steel cover plate
Wireless connectivity for setup and control: AHlink.

Monitor:

Patented single engine mechanism for up/down and tilt movements

Automatic 20 ° tilt angle

Milled aluminium housing with a contemporary design

Front double sided anti-reflecting 2 sides coating 3 mm. black edged glass

Microphone's lift system:


Microphone lift compatible with 3 Pin XLR 500 mm gooseneck microphones

Patented 360 ° LED lighting ring to indicate microphone status

PA and Conference working modes

Available customisations with conference brands

Dynamic X2Talk



For custom options, special features and optional accessories, please see below.



AH15DX2HDGA	AH17DX2HDGA	AH19DX2HDGA	AH22DX216GA
FB Free button (GPO)	FB Free button (GPO)	FB Free button (GPO)	FB Free button (GPO)
PO AC Power outlet	PO AC Power outlet	PO AC Power outlet	PO AC Power outlet
AJ Audio mini-jack	AJ Audio mini-jack	AJ Audio mini-jack	AJ Audio mini-jack
VGACP VGA passthrough	VGACP VGA passthrough	VGACP VGA passthrough	VGACP VGA passthrough
HDMICP HDMI passthrough	HDMICP HDMI passthrough	HDMICP HDMI passthrough	HDMICP HDMI passthrough
AHISBD2PT HDMI retractable passthrough	AHISBD2PT HDMI retractable passthrough	AHISBD2PT HDMI retractable passthrough	AHISBD2PT HDMI retractable passthrough
DPCP DisplayPort connector	DPCP DisplayPort connector	DPCP DisplayPort connector	DPCP DisplayPort connector
RJ45CP RJ45 connector	RJ45CP RJ45 connector	RJ45CP RJ45 connector	RJ45CP RJ45 connector
CCXLR3P 3 pin XLR connector	CCXLR3P 3 pin XLR connector	CCXLR3P 3 pin XLR connector	CCXLR3P 3 pin XLR connector
CCSPKD2 2" , 15W, 8 Ohm passive loudspeaker	CCSPKD2 2" , 15W, 8 Ohm passive loudspeaker	CCSPKD2 2" , 15W, 8 Ohm passive loudspeaker	CCSPKD2 2" , 15W, 8 Ohm passive loudspeaker
HDMICP HDMI passthrough	HDMICP HDMI passthrough	HDMICP HDMI passthrough	HDMICP HDMI passthrough
CABD2T (Min. 10 units) Black anodised	CABD2T (Min. 10 units) Black anodised	CABD2T (Min. 10 units) Black anodised	CABD2T (Min. 10 units) Black anodised
GFD2T (Min. 10 units) Gold finish	GFD2T (Min. 10 units) Gold finish	GFD2T (Min. 10 units) Gold finish	GFD2T (Min. 10 units) Gold finish
BFD2T (Min. 10 units) Bronze finish	BFD2T (Min. 10 units) Bronze finish	BFD2T (Min. 10 units) Bronze finish	BFD2T (Min. 10 units) Bronze finish
CPD2T (Min. 10 units) Painted	CPD2T (Min. 10 units) Painted	CPD2T (Min. 10 units) Painted	CPD2T (Min. 10 units) Painted
AHDL DynamicLoop	AHDL DynamicLoop	AHDL DynamicLoop	AHDL DynamicLoop
AHDSS DynamicShare	AHDSS DynamicShare	AHDSS DynamicShare	AHDSS DynamicShare

Aluminium retractable monitor with an independent microphone lift
 Stainless steel cover plate
 Wireless connectivity for setup and control: AHlink.


Monitor:

Patented single engine mechanism for up/down and tilt movements
 Automatic 20 ° tilt angle
 Milled aluminium housing with a contemporary design
 Front double sided anti-reflecting 2 sides coating 3 mm. black edged glass

Microphone's lift system:

Microphone lift compatible with 3 Pin XLR 500 mm gooseneck microphones
 Patented 360 ° LED lighting ring to indicate microphone status
 PA and Conference working modes
 Available customisations with conference brands

Dynamic X2Talk



For custom options, special features and optional accessories, please see below.



AH15DX2HDGA	AH17DX2HDGA	AH19DX2HDGA	AH22DX216GA
AHISBD2 HDMI retractable (Share)	AHISBD2 HDMI retractable (Share)	AHISBD2 HDMI retractable (Share)	AHISBD2 HDMI retractable (Share)
AHHC HDMI fixed (Share)	AHHC HDMI fixed (Share)	AHHC HDMI fixed (Share)	AHHC HDMI fixed (Share)
AHDSPB Priority	AHDSPB Priority	AHDSPB Priority	AHDSPB Priority
AHBTEK Transmitter and receiver	AHBTEK Transmitter and receiver	AHBTEK Transmitter and receiver	AHBTEK Transmitter and receiver

DynamicX2Talk

OPTIONS & ACCESSORIES



MODEL	ACCESSORIES & OPTIONS	MSRP PRICE \$
CL	Customised laser-engraved logotype on the cover plate.	86
UCS	UnderCover with stainless steel veneer.	1086
UCV	UnderCover ready to be veneered.	943
TSV	Touch sensor for UCV. The veneer material cannot be conductive.	206
AHTECB2	Box with a GPI remote control interface with 2 buttons (open/close) and 2 meter cable.	138
MCDX2T	Matte cover plate.	195
TS150HDG	Projected capacitive multi-touch screen for AH15DX2HDGA.	755
TS170HDG	Projected capacitive multi-touch screen for AH17DX2HDGA.	800
TS190HDG	Projected capacitive multi-touch screen for AH19DX2HDGA.	800
TS2216G	Projected capacitive multi-touch screen for AH22DX216GA.	858
USBCOTDX2	USB camera added to the aluminium housing above the LCD display in a black nylon 12 camera housing.	858
HDSDICOTDX2	HD-SDI camera added to the aluminium housing above the LCD display in a black nylon 12 camera housing.	1029
USBCFDX2	USB camera integrated in a frame above the LCD display.	1086
HDSDICFDX2	HD-SDI camera integrated in a frame above the LCD display.	1200
CCUSB	Integrated USB pass-through on the cover plate.	172
CC2USB	2 Integrated USB pass-throughs on the cover plate.	218
CCUSBPower	Integrated USB power on the cover plate.	206
FB	Integrated free button on the cover plate.	252
PO	Integrated power outlet on the cover plate.	309
AJ	Audio mini-jack on the cover plate.	126
VGACP	VGA connector pass-through on the cover plate.	172
HDMICP	HDMI connector on the cover plate.	172
AHISBD2PT	HDMI retractable cable integrated in the cover plate with output at the bottom.	915

DynamicX2Talk

OPTIONS & ACCESSORIES



MODEL	ACCESSORIES & OPTIONS	MSRP PRICE \$
DPCP	Display port connector on the cover plate.	126
RJ45CP	RJ45 connector on the cover plate.	126
CCXLR3P	3 pin XLR connector on the cover plate.	172
CCSPKD2	Passive speaker on the cover plate.	229
HDMIMIP	2x HDMI main inputs	69
CABD2T	Anodised in black.	515
GFD2T	Gold finish.	880
BFD2T	Bronze finish.	880
CPD2T	Painted.	320
AHDL	DynamicLoop allows the daisy chain of tan HDMI signal. This board is internally integrated so no additional power supplies are needed and it provides HDMI I/O. The loop doesn't need to be closed. A Maximum of 20 units can be daisy chained at Full HD resolution with maximum 40 meters of cables in total (no cable in the chain should exceed 5 meters, it is always recommended to use 4K cables; and always use the shortest possible).	503
AHDSS	DynamicShare allows the daisy chain of HDMI signals, the input selection, the share and the control (AHnet). This board is integrated in the monitor so neither additional power supplies nor additional devices are needed. The loop needs to be closed (ring loop). A Maximum of 20 units can be daisy chained at Full HD resolution with maximum 40 meters of cables in total (no cable in the chain should exceed 2 meters. It is always recommended to use 4 K cables; and always use the shortest possible. An extender kit is needed when the distance between the first and the last monitor is longer than 5 meters.	686
AHISBD2	HDMI retractable cable integrated into the monitor's cover plate allowing users to share one input to the rest of devices connected by DynamicShare.	915
AHHC	Fixed HDMI connector integrated into the monitor's cover plate allowing users to share this input to the rest of devices connected by DynamicShare. HD-SDI camera integrated in a frame above the LCD display.	160
AHDSPB	Priority button integrated on the monitor's cover plate that can lock other user's share function. Only one priority button can be assembled on the system.	52
AHBTEK	Kit that comprises one transmitter and one receiver to extend the HDMI connection above 5 meters from the first to the last unit in the loop.	515
Conference customisations available: Beyerdynamic, Audio-Technica, Bosch, Sennheiser, Shure, Televic		Please ask

Compact, space optimising and elegant solution
 Stainless steel active cover plate
 Motorised keyboard and mouse compartments
 Connectivity for wired keyboard and mouse
 Wireless connectivity for setup and control: AHlink

Monitor:

Patented single engine mechanism for up/down and tilt movements
 Automatic 20° tilt angle
 Milled aluminium housing with a contemporary design
 Front double sided anti-reflecting 2 sides coating
 3 mm. black edged glass

DynamicX2KM



DynamicX2 monitor combined with an automated keyboard and mouse, creating a motorised automation system that lifts the keyboard and mouse at the same time the monitor is being raised. This combination offers the best possible quality Full HD screen with an elegant keyboard and mouse storage that converts into a work station by the touch of a button. It is intuitive and extremely easy to install; a solution that offers improved table space and a neater environment.

- Keyboard and mouse are not included.

MODEL	DESCRIPTION	MSRP PRICE \$
AH17DX2KM	HDCP compliant vertically retractable aluminium 17.3" Full HD monitor with 20 degrees of automatic inclination. Single engine patented mechanism. Solid aluminium monitor in natural anodisation finish featuring 3 mm. double sided anti reflective black edged glass. Up-table cover plate made of brushed stainless steel Active opening cover plate .DVI-I and DVI-D inputs. Interactive Setup Display allowing the control, setup and diagnose of the monitors. Monitors provide RS-422 I/O allowing the remote control of movements, speeds, safety settings, brightness, contrast and backlight. The monitors are equipped with AH-AMMC: an auto mechanical movement calibration system. The system includes an automated keyboard and mouse compartment that lift these accessories together with the screen. AHlink.	6160
AH22DX2KM	HDCP compliant vertically retractable aluminium 21.5" Full HD monitor with 20 degrees of automatic inclination. Single engine patented mechanism. Solid aluminium monitor in natural anodisation finish featuring 3 mm. double sided anti reflective black edged glass. Up-table cover plate made of brushed stainless steel. Active opening cover plate. DVI-I and DVI-D inputs. Interactive Setup Display allowing the control, setup and diagnose of the monitors. Monitors provide RS-422 I/O allowing the remote control of movements, speeds, safety settings, brightness, contrast and backlight. The monitors are equipped with AH-AMMC: an auto mechanical movement calibration system. The system includes an automated keyboard and mouse compartment that lift these accessories together with the screen. AHlink	6515

For custom options, special features and optional accessories, please see below.

AH17DX2KM	AH22DX2KM
TS170HDG Projected capacitive multi-touch screen	TS2216G Projected capacitive multi-touch screen
UCSKM (Min. 10 units) UnderCover with stainless steel veneer.	UCSKM (Min. 10 units) UnderCover with stainless steel veneer.
CL (Min.5 units) Laser engraved logo	CL (Min.5 units) Laser engraved logo
TSV (Min. 10 units) Touch sensor for UnderCover	TSV (Min. 10 units) Touch sensor for UnderCover

DynamicX2KM

OPTIONS & ACCESSORIES

MODEL	ACCESSORIES & OPTIONS	MSRP PRICE \$
TS170HDG	Projected capacitive multi-touch screen for AH17DX2KM.	800
TS2216G	Projected capacitive multi-touch screen for AH22DX2KM.	858
UCSKM	UnderCover with stainless steel veneer.	0
CL	Customised laser-engraved logotype on the cover plate.	86
TSV	Touch sensor for UCV. The veneer material cannot be conductive.	206
UCVKM	UnderCover for veneering.	0

Low profile monitor enclosure
 Entire built in anodised aluminium: monitor housing and cover plate
 Opens, folds and rotates 180°
 2 working positions: vertical and horizontal
 Automatic image flip
 Patented synchronised tray lift movement
 Keyboard and mouse storage space
 Flotating security sensor
 AH-AMMC: Auto Mechanical Movement Calibration
 Wireless connectivity for setup and control: AHlink

Dynamic3



Dynamic3 is a motorised product range that provides different working positions while keeping a low profile inside the working desk and a perfect integration in the furniture. The aluminium monitor housing rises and leans, has an additional 180° rotation movement, and retracts inside the work surface in 2 different positions: with the monitor oriented up or down. The movement can be stopped at 90° and then rotate 180° in order to share the display with the person located at the opposite side of the desk. The screen's lifting system automatically activates the elevation of a tray where a keyboard and mouse can be placed.


MODEL	DESCRIPTION	MSRP PRICE \$
AH15D3RHDGA	HDCP compliant 15.6" Full HD foldable monitor with horizontal and vertical working positions. Can work in a horizontal position levelled with the desk surface or in a vertical position with 20° of variable inclination. The monitor can rotate 180° and can be folded with the screen facing down. Both the monitor housing and cover plate are made of anodised aluminium. The monitor is protected by a 3 mm. double-sided anti-reflective black edged glass. DVI-I and DVI-D inputs. Interactive Setup Display allowing the control, setup and diagnose of the monitors. Monitors provide RS-422 I/O allowing the remote control of movements, speeds, safety settings, brightness, contrast and backlight. The monitors are equipped with AH-AMMC: an auto mechanical movement calibration system. AHlink.	5258
AH15D3HDGA	HDCP compliant 15.6" Full HD foldable monitor with vertical working position. Can work in a in a vertical position with 20° of variable inclination. The monitor can be folded with the screen facing down. Both the monitor housing and cover plate are made of anodised aluminium. The monitor is protected by a 3 mm. double-sided anti-reflective black edged glass. DVI-I and DVI-D inputs. Interactive Setup Display allowing the control, setup and diagnose of the monitors. Monitors provide RS-422 I/O allowing the remote control of movements, speeds, safety settings, brightness, contrast and backlight. The monitors are equipped with AH-AMMC: an auto mechanical movement calibration system. AHlink.	4915
AH17D3RHDGA	HDCP compliant 17.3" Full HD foldable monitor with horizontal and vertical working positions. Can work in a horizontal position levelled with the desk surface or in a vertical position with 20° of variable inclination. The monitor can rotate 180° and can be folded with the screen facing down. Both the monitor housing and cover plate are made of anodised aluminium. The monitor is protected by a 3 mm. double-sided anti-reflective black edged glass. DVI-I and DVI-D inputs. Interactive Setup Display allowing the control, setup and diagnose of the monitors. Monitors provide RS-422 I/O allowing the remote control of movements, speeds, safety settings, brightness, contrast and backlight. The monitors are equipped with AH-AMMC: an auto mechanical movement calibration system. AHlink.	5715
AH17D3HDGA	HDCP compliant 17.3" Full HD foldable monitor with vertical working position. Can work in a in a vertical position with 20° of variable inclination. The monitor can be folded with the screen facing down. Both the monitor housing and cover plate are made of anodised aluminium. The monitor is protected by a 3 mm. double-sided anti-reflective black edged glass. DVI-I and DVI-D inputs. Interactive Setup Display allowing the control, setup and diagnose of the monitors. Monitors provide RS-422 I/O allowing the remote control of movements, speeds, safety settings, brightness, contrast and backlight. The monitors are equipped with AH-AMMC: an auto mechanical movement calibration system. AHlink.	5372

Low profile monitor enclosure
 Entire built in anodised aluminium: monitor housing and cover plate
 Opens, folds and rotates 180°
 2 working positions: vertical and horizontal
 Automatic image flip
 Patented synchronised tray lift movement
 Keyboard and mouse storage space
 Flotating security sensor
 AH-AMMC: Auto Mechanical Movement Calibration
 Wireless connectivity for setup and control. AHlink

Dynamic3



MODEL	DESCRIPTION	MSRP PRICE \$
AH19D3RHDGA	HDCP compliant 18.5" Full HD foldable monitor with horizontal and vertical working positions. Can work in a horizontal position levelled with the desk surface or in a vertical position with 20° of variable inclination. The monitor can rotate 180° and can be folded with the screen facing down. Both the monitor housing and cover plate are made of anodised aluminium. The monitor is protected by a 3 mm. double-sided anti-reflective black edged glass. DVI-I and DVI-D inputs. Interactive Setup Display allowing the control, setup and diagnose of the monitors. Monitors provide RS-422 I/O allowing the remote control of movements, speeds, safety settings, brightness, contrast and backlight. The monitors are equipped with AH-AMMC: an auto mechanical movement calibration system. AHlink.	5829
AH19D3HDGA	HDCP compliant 18.5" Full HD foldable monitor with vertical working position. Can work in a in a vertical position with 20° of variable inclination. The monitor can be folded with the screen facing down. Both the monitor housing and cover plate are made of anodised aluminium. The monitor is protected by a 3 mm. double-sided anti-reflective black edged glass. DVI-I and DVI-D inputs. Interactive Setup Display allowing the control, setup and diagnose of the monitors. Monitors provide RS-422 I/O allowing the remote control of movements, speeds, safety settings, brightness, contrast and backlight. The monitors are equipped with AH-AMMC: an auto mechanical movement calibration system. AHlink.	5486
AH22D3R16GA	HDCP compliant 21.5" Full HD foldable monitor with horizontal and vertical working positions. Can work in a horizontal position levelled with the desk surface or in a vertical position with 20° of variable inclination. The monitor can rotate 180° and can be folded with the screen facing down. Both the monitor housing and cover plate are made of anodised aluminium. The monitor is protected by a 3 mm. double-sided anti-reflective black edged glass. DVI-I and DVI-D inputs. Interactive Setup Display allowing the control, setup and diagnose of the monitors. Monitors provide RS-422 I/O allowing the remote control of movements, speeds, safety settings, brightness, contrast and backlight. The monitors are equipped with AH-AMMC: an auto mechanical movement calibration system. AHlink.	6172
AH22D316GA	HDCP compliant 21.5" Full HD foldable monitor with vertical working position. Can work in a in a vertical position with 20° of variable inclination. The monitor can be folded with the screen facing down. Both the monitor housing and cover plate are made of anodised aluminium. The monitor is protected by a 3 mm. double-sided anti-reflective black edged glass. DVI-I and DVI-D inputs. Interactive Setup Display allowing the control, setup and diagnose of the monitors. Monitors provide RS-422 I/O allowing the remote control of movements, speeds, safety settings, brightness, contrast and backlight. The monitors are equipped with AH-AMMC: an auto mechanical movement calibration system. AHlink.	5943



Low profile monitor enclosure

Entire built in anodised aluminium: monitor housing and cover plate

Opens, folds and rotates 180°

2 working positions: vertical and horizontal

Automatic image flip

Patented synchronised tray lift movement


Keyboard and mouse storage space

Flotating security sensor

AH-AMMC: Auto Mechanical Movement Calibration

Wireless connectivity for setup and control: AHlink

Dynamic3



For custom options, special features and optional accessories, please see below.

AH15D3RHDGA AH15D3HDGA	AH17D3RHDGA AH17D3HDGA	AH19D3RHDGA AH19D3HDGA	AH22D3R16GA AH22D316GA
CL (Min.5 units) Laser engraved logo	CL (Min.5 units) Laser engraved logo	CL (Min.5 units) Laser engraved logo	CL (Min.5 units) Laser engraved logo
UI Underneath installation	UI Underneath installation	UI Underneath installation	UI Underneath installation
TS150HDG Projected capacitive multi-touch screen. Only in horizontal position, flush on desk	TS170HDG Projected capacitive multi-touch screen. Only in horizontal position, flush on desk	TS190HDG Projected capacitive multi-touch screen. Only in horizontal position, flush on desk	TS2216G Projected capacitive multi-touch screen. Only in horizontal position, flush on desk
DTALKD3 (Min. 10 units) Built in DynamicTalkM	DTALKD3 (Min. 10 units) Built in DynamicTalkM	DTALKD3 (Min. 10 units) Built in DynamicTalkM	DTALKD3 (Min. 10 units) Built in DynamicTalkM
			USBCD3 (Min. 10 units) USB camera
CCUSBD3 USB passthrough	CCUSBD3 USB passthrough	CCUSBD3 USB passthrough	CCUSBD3 USB passthrough
CC2USBD3 2 USB passthroughs	CC2USBD3 2 USB passthroughs	CC2USBD3 2 USB passthroughs	CC2USBD3 2 USB passthroughs
CCUSBPowerD3 USB power	CCUSBPowerD3 USB power	CCUSBPowerD3 USB power	CCUSBPowerD3 USB power
KM Wired keyboard and wireless mouse	KM Wired keyboard and wireless mouse	KM Wired keyboard and wireless mouse	KM Wired keyboard and wireless mouse
AHISBD3PT (Min. 10 units) HDMI retractable passthrough	AHISBD3PT (Min. 10 units) HDMI retractable passthrough	AHISBD3PT (Min. 10 units) HDMI retractable passthrough	AHISBD3PT (Min. 10 units) HDMI retractable passthrough
AHDL3 DynamicLoop	AHDL DynamicLoop	AHDL DynamicLoop	AHDL DynamicLoop
AHDSSD3 (Min. 10 units) DynamicShare	AHDSS (Min. 10 units) DynamicShare	AHDSS (Min. 10 units) DynamicShare	AHDSS (Min. 10 units) DynamicShare
AHHC (Min. 10 units) HDMI fixed	AHHC (Min. 10 units) HDMI fixed	AHHC (Min. 10 units) HDMI fixed	AHHC (Min. 10 units) HDMI fixed
AHDSPB Priority	AHDSPB Priority	AHDSPB Priority	AHDSPB Priority
AHBTEK Transmitter and receiver	AHBTEK Transmitter and receiver	AHBTEK Transmitter and receiver	AHBTEK Transmitter and receiver
CABD3 (Min. 10 units) Black anodised	CABD3 (Min. 10 units) Black anodised	CABD3 (Min. 10 units) Black anodised	CABD3 (Min. 10 units) Black anodised
GFD3 (Min. 10 units) Gold finish	GFD3 (Min. 10 units) Gold finish	GFD3 (Min. 10 units) Gold finish	GFD3 (Min. 10 units) Gold finish

MODEL	ACCESSORIES & OPTIONS	MSRP PRICE \$
CL	Customised laser-engraved logotype on the cover plate.	86
UI	Underneath installation allows the monitor to be installed without a visible cover plate and it is prepared to be veneered.	0
TS150HDG	Projected capacitive multi-touch screen for AH15D3RHDGA and AH15D3HDGA.	755
TS170HDG	Projected capacitive multi-touch screen for AH17D3RHDGA and AH17D3HDGA.	800
TS190HDG	Projected capacitive multi-touch screen for AH19D3RHDGA and AH19D3HDGA.	800
TS2216G	Projected capacitive multi-touch screen for AH22D3R16GA and AH22D316GA.	858
DTalkD3	DynamicTalk built-in the cover plate.	1543
USBCD3	Integrated USB camera.	915
CCUSBD3	Integrated USB pass-through on the cover plate.	252
CC2USBD3	2 Integrated USB pass-throughs on the cover plate.	309
CCUSBPowerD3	Integrated USB power on the cover plate.	275
KM	Keyboard and mouse.	229
AHISBD3PT	HDMI retractable cable integrated in the cover plate with output at the bottom.	1086
AHDLD3	DynamicLoop.	600
AHDSSD3	DynamicShare.	800
AHHC	HDMI connector integrated on the cover plate.	160
AHDSPB	Priority button.	52
AHBTEK	Kit that comprises one transmitter and one receiver to extend the HDMI connection above 5 meters from the first to the last unit in the loop.	515
CABD3	Anodised in black.	1006
GFD3	Gold finish.	1258
CPD3	Painted	440



Low profile monitor enclosure
 Entire built in anodised aluminium: monitor housing and cover plate
 Opens, folds and rotates 180°
 2 working positions: vertical and horizontal
 Automatic image flip
 Patented synchronised tray lift movement
 Keyboard and mouse storage space
 Flotating security sensor
 AH-AMMC: Auto Mechanical Movement Calibration
 Microphone lift compatible with 3 pin XLR 500 mm.
 "gooseneck" microphones
 Patented 360 ° LED ring to indicate microphone status
 PA and Conference working modes
 Allows customisation with conference brands
 Wireless connectivity for setup and control: AHlink

Dynamic3Talk



Dynamic3Talk is a motorised product range that provides different working positions and includes an independent lift for "gooseneck" microphones. The aluminium monitor housing rises and leans, has an additional 180° rotation movement, and retracts inside the work surface in 2 different positions: with the monitor oriented up or down.

The screen's lifting system automatically activates the elevation of a tray where a keyboard and mouse can be placed. The integrated independent lift system for microphones provides a rounded microphone coverlid and it not only makes the microphone disappear within the desk surface, but it also provides a pleasant light to indicate its status. Thanks to its protective and patented lighting ring, the microphones can be safely stored and protected making meeting and conference spaces more flexible and versatile.

MODEL	DESCRIPTION	MSRP PRICE \$
AH17D3RHDGATalk	HDCP compliant 17.3" Full HD foldable monitor with horizontal and vertical working positions including an independent lift for "gooseneck" type microphones. Can work in a horizontal position levelled with the desk surface or in a vertical position with 20° of variable inclination. The monitor can rotate 180° and can be folded with the screen facing down. Both the monitor housing and cover plate are made of anodised aluminium. The monitor is protected by a 3 mm. double-sided anti-reflective black edged glass. DVI-I and DVI-D inputs. Interactive Setup Display allowing the control, setup and diagnose of the monitors. Monitors provide RS-422 I/O allowing the remote control of movements, speeds, safety settings, brightness, contrast and backlight. The monitors are equipped with AH-AMMC: an auto mechanical movement calibration system. AHlink.	7258
AH17D3HDGATalk	HDCP compliant 17.3" Full HD foldable monitor with vertical working position including an independent lift for "gooseneck" microphones. Can work in a vertical position with 20° of variable inclination. The monitor can be folded with the screen facing down. Both the monitor housing and cover plate are made of anodised aluminium. The monitor is protected by a 3 mm. double-sided anti-reflective black edged glass. DVI-I and DVI-D inputs. Interactive Setup Display allowing the control, setup and diagnose of the monitors. Monitors provide RS-422 I/O allowing the remote control of movements, speeds, safety settings, brightness, contrast and backlight. The monitors are equipped with AH-AMMC: an auto mechanical movement calibration system. AHlink.	6915
AH19D3RHDGATalk	HDCP compliant 18.5" Full HD foldable monitor with horizontal and vertical working positions including an independent lift for "gooseneck" type microphones. Can work in a horizontal position levelled with the desk surface or in a vertical position with 20° of variable inclination. The monitor can rotate 180° and can be folded with the screen facing down. Both the monitor housing and cover plate are made of anodised aluminium. The monitor is protected by a 3 mm. double-sided anti-reflective black edged glass. DVI-I and DVI-D inputs. Interactive Setup Display allowing the control, setup and diagnose of the monitors. Monitors provide RS-422 I/O allowing the remote control of movements, speeds, safety settings, brightness, contrast and backlight. The monitors are equipped with AH-AMMC: an auto mechanical movement calibration system. AHlink.	7372

Dynamic3Talk

Low profile monitor enclosure
Entire built in anodised aluminium: monitor housing and cover plate
Opens, folds and rotates 180°
2 working positions: vertical and horizontal
Automatic image flip
Patented synchronised tray lift movement
Keyboard and mouse storage space
Flotating security sensor
AH-AMMC: Auto Mechanical Movement Calibration
Microphone lift compatible with 3 pin XLR 500 mm.
"gooseneck" microphones
Patented 360 ° LED ring to indicate microphone status
PA and Conference working modes
Allows customisation with conference brands
Wireless connectivity for setup and control: AHlink.



MODEL	DESCRIPTION	MSRP PRICE \$
AH19D3HDGATalk	HDCP compliant 18.5" Full HD foldable monitor with vertical working position including an independent lift for "gooseneck" microphones. Can work in a in a vertical position with 20° of variable inclination. The monitor can be folded with the screen facing down. Both the monitor housing and cover plate are made of anodised aluminium. The monitor is protected by a 3 mm. double-sided anti-reflective black edged glass. DVI-I and DVI-D inputs. Interactive Setup Display allowing the control, setup and diagnose of the monitors. Monitors provide RS-422 I/O allowing the remote control of movements, speeds, safety settings, brightness, contrast and backlight. The monitors are equipped with AH-AMMC: an auto mechanical movement calibration system. AHlink.	7029



Low profile monitor enclosure
 Entire built in anodised aluminium: monitor housing and cover plate
 Opens, folds and rotates 180°
 2 working positions: vertical and horizontal
 Automatic image flip
 Patented synchronised tray lift movement
 Keyboard and mouse storage space
 Flotating security sensor
 AH-AMMC: Auto Mechanical Movement Calibration
 Microphone lift compatible with 3 pin XLR 500 mm
 "gooseneck" microphones
 Patented 360 ° LED ring to indicate microphone status
 PA and Conference working modes
 Allows customisation with conference brands
 Wireless connectivity for setup and control: AHlink.

Dynamic3Talk



For custom options, special features and optional accessories, please see below.

AH17D3RHDGATalk	AH17D3HDGATalk	AH19D3RHDGATalk	AH19D3HDGATalk
CL (Min.5 units) Laser engraved logo	CL (Min.5 units) Laser engraved logo	CL (Min.5 units) Laser engraved logo	CL (Min.5 units) Laser engraved logo
TS170HDG Projected capacitive multi-touch screen. Only in horizontal position, flush on desk	TS170HDG Projected capacitive multi-touch screen. Only in horizontal position, flush on desk	TS190HDG Projected capacitive multi-touch screen. Only in horizontal position, flush on desk	TS190HDG Projected capacitive multi-touch screen. Only in horizontal position, flush on desk
USBCD3 Integrated USB camera.	USBCD3 Integrated USB camera.	USBCD3 Integrated USB camera.	USBCD3 Integrated USB camera.
CCUSBD3 USB passthrough	CCUSBD3 USB passthrough	CCUSBD3 USB passthrough	CCUSBD3 USB passthrough
CC2USBD3 2 USB passthroughs	CC2USBD3 2 USB passthroughs	CC2USBD3 2 USB passthroughs	CC2USBD3 2 USB passthroughs
CCUSBPowerD3 USB power	CCUSBPowerD3 USB power	CCUSBPowerD3 USB power	CCUSBPowerD3 USB power
KM Wired keyboard and wireless mouse	KM Wired keyboard and wireless mouse	KM Wired keyboard and wireless mouse	KM Wired keyboard and wireless mouse
AHISBD3PT (Min. 10 units) HDMI retractable passthrough	AHISBD3PT (Min. 10 units) HDMI retractable passthrough	AHISBD3PT (Min. 10 units) HDMI retractable passthrough	AHISBD3PT (Min. 10 units) HDMI retractable passthrough
AHDLD3 DynamicLoop	AHDLD3 DynamicLoop	AHDLD3 DynamicLoop	AHDLD3 DynamicLoop
AHDSSD3 (Min. 10 units) DynamicShare	AHDSSD3 (Min. 10 units) DynamicShare	AHDSSD3 (Min. 10 units) DynamicShare	AHDSSD3 (Min. 10 units) DynamicShare
AHHC (Min. 10 units) HDMI fixed	AHHC (Min. 10 units) HDMI fixed	AHHC (Min. 10 units) HDMI fixed	AHHC (Min. 10 units) HDMI fixed
AHDSPB Priority	AHDSPB Priority	AHDSPB Priority	AHDSPB Priority
AHBTEK Transmitter and receiver	AHBTEK Transmitter and receiver	AHBTEK Transmitter and receiver	AHBTEK Transmitter and receiver
CABD3T (Min. 10 units) Black anodised	CABD3T (Min. 10 units) Black anodised	CABD3T (Min. 10 units) Black anodised	CABD3T (Min. 10 units) Black anodised
GFD3T (Min. 10 units) Gold finish	GFD3T (Min. 10 units) Gold finish	GFD3T (Min. 10 units) Gold finish	GFD3T (Min. 10 units) Gold finish
CPD3T (Min. 10 units) Painted	CPD3T (Min. 10 units) Painted	CPD3T (Min. 10 units) Painted	CPD3T (Min. 10 units) Painted

MODEL	ACCESSORIES & OPTIONS	MSRP PRICE \$
CL	Customised laser-engraved logotype on the cover plate.	86
TS170HDGTalk	Projected capacitive multi-touch screen for AH17D3RHDGA and AH17D3HDGA.	800
TS190HDGTalk	Projected capacitive multi-touch screen for AH19D3RHDGA and AH19D3HDGA.	800
USBCD3	Integrated USB camera.	915
CCUSBD3	Integrated USB pass-through on the cover plate.	252
CC2USBD3	2 Integrated USB pass-throughs on the cover plate.	309
CCUSBPowerD3	Integrated USB power on the cover plate.	275
KM	Keyboard and mouse.	229
AHISBD3PT	HDMI retractable cable integrated in the cover plate with output at the bottom.	1086
AHDLD3	DynamicLoop.	600
AHDSSD3	DynamicShare.	800
AHHC	HDMI connector integrated on the cover plate.	160
AHDSPB	Priority button.	52
AHBTEK	Kit that comprises one transmitter and one receiver to extend the HDMI connection above 5 meters from the first to the last unit in the loop.	515
CABD3T	Anodised in black.	1046
GFD3T	Gold finish.	1315
CPD3T	Painted.	480



Low profile monitor enclosure

Entire built in anodised aluminium: monitor housing and cover plate

Adjustable viewing angle from 0° to 90°

Can be folded with the screen facing down

The desired tilt angle can be memorised

AH-AMMC: Auto Mechanical Movement Calibration

Wireless connectivity for setup and control: AHlink

Dynamic3Reverse



Dynamic3Reverse is a unique electrically foldable 18,5" monitor with horizontal and vertical working positions. Its tilt angle can be adjusted to any point, from flush with the desk up to 90°, and it rotates to be folded. The rotation axis is located in the area that is closer to the user and the user can select the desired tilt angle, from flush on the table to a vertical position, ensuring a total view on the room. The monitor can then rotate 180° to be closed with the screen facing down and therefore, totally protected.

MODEL	DESCRIPTION	MSRP PRICE \$
AH18D3RHDGA	HDCP compliant 18.5" Full HD foldable monitor with horizontal and vertical working positions. Can work in a horizontal position levelled with the desk surface or in a vertical position up to 90°. The monitor can rotate 180° and can be folded with the screen facing down. Both the monitor housing and cover plate are made of anodised aluminium. The monitor is protected by a 3 mm. double-sided anti-reflective black edged glass. DVI-I and DVI-D inputs. Interactive Setup Display allowing the control, setup and diagnose of the monitors. Monitors provide RS-422 I/O allowing the remote control of movements, speeds, safety settings, brightness, contrast and backlight. The monitors are equipped with AH-AMMC: an auto mechanical movement calibration system. AHlink.	5783

For custom options, special features and optional accessories, please see below.

AH18D3RHDGA	AH18D3RHDGA
CL (Min.5 units) Laser engraved logo	AHDSSD3 (Min.10 units) DynamicShare
TS190HDG Projected capacitive multi-touch screen	AHHC (Min.10 units) HDMI fixed
DTalkD3 (Min.10 units) Built in DynamicTalkM	AHDSPB Priority
CCUSB D3 USB passthrough	CABD3 (Min.10 units) Black anodised
CC2USB D3 2 USB passthroughs	AHBTEK Transmitter and receiver
CCUSBPowerD3 USB power	GFD3 (Min.10 units) Gold finish
AHISBD3PT (Min.10 units) HDMI retractable passthrough	CPD3 (Min.10 units) Painted
AHDL D3 DynamicLoop	



Dynamic3Reverse


OPTIONS & ACCESSORIES

MODEL	ACCESSORIES & OPTIONS	MSRP PRICE \$
CL	Customised laser-engraved logotype on the cover plate.	86
TS190HDG	Projected capacitive multi-touch screen for AH18D3RHDGA.	800
DTalkD3	DynamicTalk built-in the cover plate.	1543
CCUSBD3	Integrated USB pass-through on the cover plate.	252
CC2USBD3	2 Integrated USB pass-throughs on the cover plate.	309
CCUSBPowerD3	Integrated USB power on the cover plate.	275
AHISBD3PT	HDMI retractable cable integrated in the cover plate with output at the bottom.	1086
AHDLD3	DynamicLoop.	600
AHDSSD3	DynamicShare.	800
AHHC	HDMI connector integrated on the cover plate.	160
AHDSPB	Priority button.	52
AHBTEK	Kit that comprises one transmitter and one receiver to extend the HDMI connection above 5 meters from the first to the last unit in the loop.	515
CABD3	Anodised in black.	1006
GFD3	Gold finish.	1258
CPD3	Painted	440




Low profile monitor enclosure
 Entire built in anodised aluminium: monitor housing and cover plate
 Adjustable position from 0 ° to 70°
 Memory for the desired position
 Patented lifting mechanism
 Interactive Setup Display
 Maintenance free
 Safety system
 AH-AMMC Auto Mechanical Movement Calibration
 Wireless connectivity for setup and control: AHlink

Dynamic1H



Dynamic1H motorised foldable monitors provide a horizontal motorised movement. The screen is always visible, it raises and leans and can be stopped at any position between 0° and 70°. A smart memory system enables both the set up and recall of the desired tilting position. Built entirely of aluminium and with a black edged anti-reflection glass, Dynamic1H monitors are extremely elegant, discreet and timeless.

MODEL	DESCRIPTION	MSRP PRICE \$
AH17D1HGA	HDCP compliant 17.3" Full HD foldable monitor with the screen always facing up. Can work in a horizontal position levelled with the desk surface and can be lifted up to 70 °. Both the monitor housing and cover plate are made of anodised aluminium. The monitor is protected by a 3 mm. double-sided anti- reflective black edged glass. DVI-I and DVI-D inputs. Interactive Setup Display allowing the control, setup and diagnose of the monitors. Monitors provide RS-422 I/O allowing the remote control of movements, speeds, safety settings, brightness, contrast and backlight. The monitors are equipped with AMMC: an auto mechanical movement calibration system. AHlink.	4400
AH22D1HGA	HDCP compliant 21.5" Full HD foldable monitor with the screen always facing up. Can work in a horizontal position levelled with the desk surface and can be lifted up to 70 °. Both the monitor housing and cover plate are made of anodised aluminium. The monitor is protected by a 3 mm. double-sided anti- reflective black edged glass. DVI-I and DVI-D inputs. Interactive Setup Display allowing the control, setup and diagnose of the monitors. Monitors provide RS-422 I/O allowing the remote control of movements, speeds, safety settings, brightness, contrast and backlight. The monitors are equipped with AMMC: an auto mechanical movement calibration system. AHlink.	4566



Low profile monitor enclosure

Entire built in anodised aluminium: monitor housing and cover plate

Adjustable position from 0 ° to 70°

Memory for the desired position

Patented lifting mechanism

Interactive Setup Display


Maintenance free

Safety system

AH-AMMC Auto Mechanical Movement Calibration

Wireless connectivity for setup and control: AHlink

Dynamic1H




For custom options, special features and optional accessories, please see below.

AH17D1HGA	AH22D1HGA
CL (Min.5 units) Laser engraved logo	CL (Min.5 units) Laser engraved logo
TS170HDG Projected capacitive multi-touch screen	TS2216G Projected capacitive multi-touch screen
DTalkD1H (Min. 10 units) Built-in DynamicTalkM	DTalkD1H (Min. 10 units) Built-in DynamicTalkM
CCUSBD1H USB passthrough	CCUSBD1H USB passthrough
CC2USBD1H 2 USB passthroughs	CC2USBD1H 2 USB passthroughs
CCUSBPowerD1H USB power	CCUSBPowerD1H USB power
AHISB1HPT (Min. 10 units) HDMI retractable passthrough	AHISB1HPT (Min. 10 units) HDMI retractable passthrough
AHDLD1H DynamicLoop	AHDLD1H DynamicLoop
AHDSSD1H (Min. 10 units) DynamicShare	AHDSSD1H (Min. 10 units) DynamicShare
AHHC (Min. 10 units) HDMI fixed	AHHC (Min. 10 units) HDMI fixed
AHDSPB Priority	AHDSPB Priority
AHBTEK Transmitter and receiver	AHBTEK Transmitter and receiver
CABD1H (Min. 10 units) Black anodised	CABD1H (Min. 10 units) Black anodised
GFD1H (Min. 10 units) Gold finish	GFD1H (Min. 10 units) Gold finish
BFD1H (Min. 10 units) Bronze finish	BFD1H (Min. 10 units) Bronze finish
CPD1H (Min. 10 units) Painted	CPD1H (Min. 10 units) Painted

Dynamic1H



OPTIONS & ACCESSORIES

MODEL	ACCESSORIES & OPTIONS	MSRP PRICE \$
CL	Customised laser-engraved logotype on the cover plate.	86
TS170HDG	Projective capacitive multi-touch screen for AH17DH1GA.	800
TS2216G	Projective capacitive multi-touch screen for AH22DH1GA.	858
DTalkD1H	DynamicTalk built-in the cover plate.	1543
CCUSBD1H	Integrated USB pass-through on the cover plate.	252
CC2USBD1H	2 Integrated USB pass-throughs on the cover plate.	309
CCUSBPowerD1H	Integrated USB power on the cover plate.	275
AHISBD1HPT	HDMI retractable cable integrated in the cover plate with output at the bottom.	1086
AHDLD1H	DynamicLoop.	600
AHDSSD1H	DynamicShare.	800
AHHC	HDMI connector integrated on the cover plate.	160
AHDSPB	Priority button.	52
AHBTEK	Kit that comprises one transmitter and one receiver to extend the HDMI connection above 5 meters from the first to the last unit in the loop.	515
CABD1H	Anodised in black.	629
GFD1H	Gold finish.	829
BFD1H	Bronze finish.	892
CPD1H	Painted.	315



Double sided solution
 Anodised aluminium housing
 No cover plate
 Ready for veneering
 Capacitive sensor
 Interactive Setup Display
 Maintenance free
 Safety system
 AH-AMMC Auto Mechanical Movement
 Calibration
 Wireless connectivity for setup and control: AHlink

DB1Twin

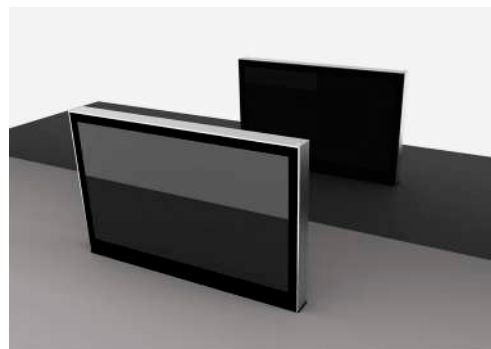

DB1Twin is a vertically retractable monitor with a double screen. 2 monitors are placed back to back in a compact anodised aluminium frame to display different content for a 2 way communication. It is designed for reception desks, information counters or meeting and conference room tables with limited space. The screens are only visible when required, disappearing inside the table desk when not needed by simply pressing a capacitive button located on the monitors' top frame. DB1Twin has been designed for an easy veneer or to be installed levelled with the furniture's surface.


MODEL	DESCRIPTION	MSRP PRICE \$
AH22DB1Twin	HDCP compliant vertically retractable double Full HD 21.5" monitor to be integrated into furniture. Solid aluminium monitor housing in natural anodised finish. DVI-I and DVI-D inputs per each monitor (2). Interactive Setup Display allowing the control, setup and diagnose of the monitors. Monitors provide RS-422 I/O allowing the remote control of movements, speeds, safety settings, brightness, contrast and backlight. The monitors are equipped with AH-AMMC: an auto mechanical movement calibration system. AHlink.	5783

For custom options, special features and optional accessories, please see below.

AH22DB1Twin
TSVDB1 Touch sensor for veneer



MODEL	ACCESSORIES & OPTIONS	MSRP PRICE \$
TSVDB1	Larger capacitive touch sensor on the top frame with automatic sensitive adjustment according to the veneer.	206



Half widescreen double sided motorised monitor

Internal embedded computer

Software provided

Interactive Setup Display

Maintenance free

Safety system



AH-AMMC Auto Mechanical Movement

Calibration

Wireless connectivity for setup and control:

AHlink.

DynamicSignatureDisplay

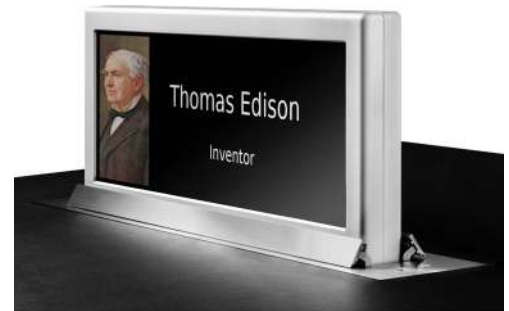

DynamicSignatureDisplay is a retractable digital labelling monitor for auditoriums, meeting and conference rooms, institutions and public communication spaces. The product consists of a vertically motorised retractable double side stretched screen and a Linux based software, which allows a simple display of a picture and a name (or any digital content) in full colour. Two screens are placed back to back in a compact, anodised aluminium frame, displaying different information on each one. The side facing the audience will display the picture and name of the conference participant, and the information in the other side allows the attendee to identify the seat. The system is ideal for name tagging applications over a single Ethernet connection per monitor.

DynamicSignatureDisplay is equipped with a Linux based player, with TCP/IP interface for control, configuration and content upload and management.

The system needs a dedicated network to operate. It is necessary to add a server and the management software is pre-installed and configured from factory.

MODEL	DESCRIPTION	MSRP PRICE \$
AH19DSDA2F	HDCP compliant vertically retractable double half Full HD 18.5" monitor to be integrated into furniture. Solid aluminium monitor housing in natural anodised finish and up-table cover plate made of brushed stainless steel. DVI-I and DVI-D inputs per each monitor (2). Interactive Setup Display allowing the control, setup and diagnose of the monitors. Monitors provide RS-422 I/O allowing the remote control of movements, speeds, safety settings, brightness, contrast and backlight. The monitors are equipped with AH-AMMC: an auto mechanical movement calibration system. 2 Embedded PCs. Linux based software. AHlink.	6583
AHDSServer	Server to manage the system and to create data bases with names and pictures, preconfigured and prepared in factory. AHlink. Minimum Order Quantity 20 pcs.	please ask



Adapts to multiple chair armrests

Motorised adjustable angle

Panic function

Interactive Setup Display

Maintenance free

Safety system


AH-AMMC Auto Mechanical Movement

Calibration

Wireless connectivity for setup and control:

AHlink.

DynamicChairDisplay



DynamicChairDisplay is a retractable motorised monitor to be integrated in chair armrests. The monitor is only visible when it is in use and it is safely stored in the armrest when not needed.

This elegant aluminium screen possesses an automatic vertical extraction movement plus an additional manual rotation towards the user followed by a motorised tilt adjustment. The monitor housing is made of milled aluminium with anodised finish. Its mechanism is robust and silent and the whole solution is integrated in a compact block, being very simple to install.

MODEL	DESCRIPTION	MSRP PRICE \$
AH15DCDHD	HDCP compliant 15.6" Full HD motorised monitor for armrest integration. DVI-I and DVI-D inputs Interactive Setup Display allowing the control setup and diagnose of the monitors. The monitor provides RS-422 I/O allowing the remote control of movements, speeds, safety settings, brightness, contrast and backlight. The monitors are equipped with AH-AMMC: an auto mechanical movement calibration system. AHlink.	6400

For custom options, special features and optional accessories, please see below.

AH15DCDHD
TS150HD Projected capacitive multi-touch screen
CCUSBPowerDCD (Min. 10 units) USB power
EMS (Min. 10 units) Synchronised mic



MODEL	ACCESSORIES & OPTIONS	MSRP PRICE \$
TS150HD	Projective capacitive multi-touch screen for AH15DCDHD.	629
CCUSBPowerDCD	Integrated USB power on the cover plate.	275
EMS	Synchronised mechanism for gooseneck microphones.	1195

All-in-one solution for hybrid and in-person meetings

Human-centered motorised retractable solution

Adaptable shape to a variable number of attendees

Face-to-face communication

Excellent audio and video quality

4 video cameras, speakers, microphones,

USB charging, HDMI and wireless connectivity

Internal PC to upload any platform: Teams,

Dynamic4



The Dynamic4 is a unique Windows based media meeting point that creates an unmatched meeting platform with extended flexibility. It comprises a motorised mechanism of 4 screens with 4 integrated cameras, 2 speakers, 2 array microphones, a CPU, 4 USB power and 2 tabletop HDMI inputs. It is a center of table solution that helps to optimize the space and to keep the eye contact during the meetings. By the push of a button, 4 monitors will raise from the table surface.

These monitors can be raised and retracted, they can move to different shapes and rotate to find the perfect position according to the different seats around the table. These monitors can be arranged according to the number of meeting attendees and their position, from a flat diamond shape to a square shape. A software driver allows the 4 cameras to be shown simultaneously, and 2 array microphones together with the speakers ensure a perfect speech intelligibility. The internal CPU comes with Windows 10 and allows to connect to a server or to apps for remote meetings such as Zoom, Teams, Meet, Skype, and more.

MODEL	DESCRIPTION	MSRP PRICE \$
AH17D4HDGA	Windows based media meeting point comprising HDCP compliant 4 X 17,3" FULL HD monitor solution. Comprises a retractable motorised system formed by 4 monitors, 4 video cameras, 2 loudspeakers, microphones, USB charging, HDMI connectivity, internal CPU and a control touch panel on the cover plate. The 4 monitors rise from the table surface, they can compose different shaped and rotate to face everybody around the table. From a flat diamond shape to a square shape, the monitors can be arranged to suit the number and position of the attendees. Internal CPU.	24572



Ergonomic

Motorised adjustable height

Aluminium monitor with a stainless steel arm

Manually adjustable viewing angle

140° manually rotatable

Wireless connectivity for setup and control:

AHlink.

DynamicReceptionMonitor



Motorised adjustable reception monitor for a perfect fit. Quick motorised adjustment to match each individual needs when working to create a correct and preferable work environment at the front desk.

The professional Arthur Holm DynamicReceptionMonitor incorporates the latest professional technologies to ensure a perfect workplace. It offers a non-obstructive design in which all technical interfaces and cables are internal, so the front desk is free of cables and obstructive components, creating a cleaner work environment.

The DynamicReceptionMonitor has been designed to be integrated in tables or desks. The base of the monitor is installed on the surface and its connectivity is placed below the table, making the installation clean and minimalistic. The elegant monitor housing is made of milled aluminium and stainless steel and it includes an antiglare protection glass with black marking. The stainless steel rotary arm of the monitor offers a motorised adjustable height for a perfect fit.

MODEL	DESCRIPTION	MSRP PRICE \$
AH22DRM	HDCP compliant 21.5" Full HD monitor with motorised adjustable height. Manually adjustable vertical and horizontal viewing angle, 140 ° rotatory. Under desk clamp mounting, HDMI input.	3498

For custom options, special features and optional accessories, please see below.

AH22DRM
CL Laser engraved logo
TS2216G Projected capacitive multi-touch screen

MODEL	ACCESSORIES & OPTIONS	MSRP PRICE \$
CL	Customised laser-engraved logotype on the cover plate.	86
TS2216G	Projected capacitive multi-touch screen for AH22DRM.	858



Milled aluminium monitor with cast iron base

Front anti-reflection glass

Manually foldable

Totally adjustable position from 0° to 70°

Cable management system

USB passthrough

Maintenance free

Energy saving design

AH1



AH1 is an aluminium manually foldable monitor for table top with a natural anodised finish and a black cast iron base. This multifunctional iron base serves for several purposes: the unobstructed base holds firmly the aluminium monitor housing in place and provides a stepless adjustment of the viewing area. Furthermore, the base hides the cable connection and guides the cables unseen away from the monitor when using the cable exit in the centre of the base or, if needed, the rear cable outlet.

The screen position can be easily adjusted from flat on the table to 70°.

The monitor includes a USB passthrough from the side.

AH1 is the ideal solution for auditoriums, telepresence, training rooms, meeting and conference rooms and information counters.

MODEL	DESCRIPTION	MSRP PRICE \$
AH17TXHDGA	HDCP compliant manually foldable 17.3" FULL HD aluminium monitor with anodised finishing and black cast iron base. DVI-I and DVI-D inputs. USB passthrough.	2640
AH22TX16GA	HDCP compliant manually foldable 21.5" FULL HD aluminium monitor with anodised finishing and black cast iron base. DVI-I and DVI-D inputs. USB passthrough.	2858

AH17TXHDGA	AH22TX16GA
CL (Min.5 units) Laser engraved logo	CL (Min.5 units) Laser engraved logo
TS170HDG Projected capacitive multi-touch screen	TS2216G Projected capacitive multi-touch screen
CABAH1 (Min.10 units) Black anodised	CABAH1 (Min.10 units) Black anodised
GFAH1 (Min.10 units) Gold finish	GFAH1 (Min.10 units) Gold finish
BFAH1 (Min.10 units) Bronze finish	BFAH1 (Min.10 units) Bronze finish



OPTIONS & ACCESSORIES

MODEL	ACCESSORIES & OPTIONS	MSRP PRICE \$
CL	Customised laser-engraved logotype.	86
TS170HDG	Projective capacitive multi-touch screen for AH17TXHDGA.	800
TS2216G	Projective capacitive multi-touch screen for AH22TX16GA.	858
CABAH1	Anodised in black.	600
GFAH1	Gold finish.	743
BFAH1	Bronze finish.	743



Milled aluminium monitor
 Front anti-reflection glass
 Manually foldable from 0° to 110°
 Low profile
 Auto-power off
 Maintenance free
 Energy saving design

AH2



AH2 manually foldable monitors are the perfect solution to create flexible and versatile tables needing to optimise the space.

The monitor is fixed to the table surface through its milled aluminium base, allowing the user to adjust the viewing area of the monitor, holding the monitor in a firm working position. All connectors are placed under the table and cables are passed unseen through the base to the monitor, leaving the monitor minimalistic design unobstructed.

They are aluminium monitors that can be easily folded down to leave a direct line of sight to the other participants or activities taking place in the room. Furthermore, the low profile space needed for their installation allows users to have a large cable-free surface to work using both the screen and other materials over the desk.

MODEL	DESCRIPTION	MSRP PRICE \$
AH17BTX16GA	HDCP compliant manually foldable 17.3" FULL HD aluminium monitor with anodised finishing for desk mounting. HDMI input.	2949
AH22BTX16GA	HDCP compliant manually foldable 21.5" FULL HD aluminium monitor with anodised finishing for desk mounting. HDMI input.	3223

For custom options, special features and optional accessories, please see below.

AH17BTX16GA	AH22BTX16GA
CL (Min.5 units) Laser engraved logo	CL (Min.5 units) Laser engraved logo
TS170HDG Projected capacitive multi-touch screen	TS2216G Projected capacitive multi-touch screen
CABAH2 (Min. 10 units) Black anodised	CABAH2 (Min. 10 units) Black anodised
GFAH2 (Min. 10 units) Gold finish	GFAH2 (Min. 10 units) Gold finish




OPTIONS & ACCESSORIES

MODEL	ACCESSORIES & OPTIONS	MSRP PRICE \$
CL	Customised laser-engraved logotype.	86
TS170HDG	Projected capacitive multi-touch screen for AH17BTX16GA.	800
TS2216G	Projected capacitive multi-touch screen for AH22BTX16GA.	858
CABAH2	Anodised in black.	818
GFAH2	Gold finish.	972



Compact on-wall installation monitors
Integrated wall mount
Security, anti theft locking system
3 different finishes: Steel, aluminium or glass
Energy saving design

Rise



Rise monitors are ideal to offer relevant meetings information when placed outside a conference or meeting room or in any place where they will undoubtedly catch the eye of the public. They can show details about the session taking place inside, being extremely helpful and engaging for attendees to know schedules, programmes or other general information of interest.

The monitors are robust and resistant, they are available in different sizes and finishes to integrate perfectly with the interior design and they are all set for the busy areas where they are installed. They serve users with advanced technology ready to play, elegant and easy to install, adding a distinctive smart touch in a particular building or meeting and working up an awesome experience to remember.

MODEL	DESCRIPTION	MSRP PRICE \$
AH15RI / AH15RG / AH15RA	HD-CP compliant 15.6" widescreen monitor finished with a stainless steel (I), aluminium (A) or Glass (G) front frame for on-wall integration, DVI-I and DVI-D inputs.	1183
AH17RI / AH17RG / AH17RA	HD-CP compliant 17.3" widescreen monitor finished with a stainless steel (I), aluminium (A) or Glass (G) front frame for on-wall integration, DVI-I and DVI-D inputs.	1429
AH19RI / AH19RG / AH19RA	HD-CP compliant 18.5" Full HD monitor finished with a stainless steel (I), aluminium (A) or Glass (G) front frame for on-wall integration, DVI-I and DVI-D inputs.	1486
AH22RI / AH22RG / AH22RA	HD-CP compliant 21.5" Full HD monitor finished with a stainless steel (I), aluminium (A) or Glass (G) front frame for on-wall integration, DVI-I and DVI-D inputs.	1600

Minimum Order Quantity 10 pcs.



OPTIONS & ACCESSORIES

For custom options, special features and optional accessories, please see below.

AH15RI/A/G	AH17RI/A/G	AH19RI/A/G	AH22RI/A/G
CL Laser engraved logo	CL Laser engraved logo	CL Laser engraved logo	CL Laser engraved logo
TS150HD - Not available for Glass models (G) Projected capacitive multi-touch screen	TS170HD - Not available for Glass models (G) Projected capacitive multi-touch screen	TS190HD - Not available for Glass models (G) Projected capacitive multi-touch screen	TS22010 - Not available for Glass models (G) Projected capacitive multi-touch screen
RS-232 RS-232 serial port	RS-232 RS-232 serial port	RS-232 RS-232 serial port	RS-232 RS-232 serial port

MODEL	ACCESSORIES & OPTIONS	MSRP PRICE \$
CL	Customised laser-engraved logotype.	86
TS150HD	Projected capacitive multi-touch screen for AH15RI and AH15RA.	629
TS170HD	Projected capacitive multi-touch screen for AH17RI and AH17RA.	686
TS190HD	Projected capacitive multi-touch screen for AH19RI and AH19RA.	743
TS22010	Projected capacitive multi-touch screen for AH22RI and AH22RA.	800
RS-232	RS-232 serial port.	103



Compact in-wall installation monitors
Galvanised in-wall fixed mounting box
Clip on front system
3 different finishes: Steel, aluminium or glass
Energy saving design

Drop



Designed for
wall integration

Drop monitors have been designed for an easy in-wall installation. They are supplied with a separate box for fix mounting, while the screen itself provides a “clip-on front” system. Drop monitors are available in different sizes and finishes for a perfect integration in the interior design and they provide multiple options and customisations. All models are provided with a galvanised mounting box.

MODEL	DESCRIPTION	MSRP PRICE \$
AH 15DI / AH 15DG / AH 15DA	HDCP compliant 15.6" Full HD monitor finished with a stainless steel (I), aluminium (A) or Glass (G) front frame for in-wall integration, DVI-I and DVI-D inputs.	1183
AH 17DI / AH 17DG / AH 17DA	HDCP compliant 17.3" Full HD monitor finished with a stainless steel (I), aluminium (A) or Glass (G) front frame for in-wall integration, DVI-I and DVI-D inputs.	1429
AH 19DI / AH 19DG / AH 19DA	HDCP compliant 18.5" Full HD monitor finished with a stainless steel (I), aluminium (A) or Glass (G) front frame for in-wall integration, DVI-I and DVI-D inputs.	1486
AH 22DI / AH 22DG / AH 22DA	HDCP compliant 21.5" Full HD monitor finished with a stainless steel (I), aluminium (A) or Glass (G) front frame for in-wall integration, DVI-I and DVI-D inputs.	1600

Minimum Order Quantity 10 pcs.

OPTIONS & ACCESSORIES

For custom options, special features and optional accessories, please see below.

AH15DI/A/G	AH17DI/A/G	AH19DI/A/G	AH22DI/A/G
CL Laser engraved logo	CL Laser engraved logo	CL Laser engraved logo	CL Laser engraved logo
TS150HD - Not available for Glass models (G) Projected capacitive multi- touch screen		TS190HD - Not available for Glass models (G) Projected capacitive multi- touch screen	TS22010 - Not available for Glass models (G) Projected capacitive multi- touch screen
RS-232 RS-232 serial port	RS-232 RS-232 serial port	RS-232 RS-232 serial port	RS-232 RS-232 serial port

MODEL	ACCESSORIES & OPTIONS	MSRP PRICE \$
CL	Customised laser-engraved logotype.	86
TS150HD	Projected capacitive multi-touch screen for AH15DI and AH15DA.	629
TS170HD	Projected capacitive multi-touch screen for AH17DI and AH17DA.	686
TS190HD	Projected capacitive multi-touch screen for AH19DI and AH19DA.	743
TS22010	Projected capacitive multi-touch screen for AH22DI and AH22DA.	800
RS-232	RS-232 serial port.	103



Mobile podium entirely made of security black glass

Seamless and exclusive 45° miter construction

Lockable wheels

Opening system to allow access to store computers

AHPylon



The AHPylon with integrated AV interface serves as a speaker podium or as an interactive information kiosk.

The AHPylon can be configured to match each individual's needs. Its design permits an easy displacement of the kiosk and the hidden lock system prevents from unwanted movements and unauthorized access to the internal components of the pylon. The hidden wheels create an elegant and unobstructed design while making the AHPylon always mobile.

MODEL	DESCRIPTION	MSRP PRICE \$
AH22P	Glass kiosk with a HDCP compliant professional 21.5" Full HD resolution monitor with multi-touch screen. The structure is made of 10 mm security black glass with 45° miter construction. The kiosk has hidden low resistance wheels with break for an easy movement. It includes a lock system that prevents access to the internal components and the unwanted release of the wheels breaks.	5143
AH46P	Glass kiosk with a HDCP compliant professional 46" Full HD resolution monitor with multi-touch screen. The structure is made of 10 mm. security black glass with 45° miter construction. The kiosk has hidden low resistance wheels with break for an easy movement. It includes a lock system that prevents access to the internal components and the unwanted release of the wheels breaks.	7658

For custom options, special features and optional accessories, please see below.

AH22P	AH46P
XLR3S XLR 3 pin connector	XLR3S XLR 3 pin connector
TKM Foldable tray for keyboard and mouse	TKM Foldable tray for keyboard and mouse

MODEL	ACCESSORIES & OPTIONS	MSRP PRICE \$
XLR3S	XLR 3 pin connector with shock mount.	172
TKM	Foldable tray for keyboard and mouse.	400



Universal lift system for gooseneck XLR 3 pin microphones

Stainless steel cover plate with 3 buttons


Patented 360° LED lighting ring to indicate microphone status and protect the movement of the microphone

PA and Conference working modes

AH-AMMC Auto Mechanical Movement Calibration

Wireless connectivity for setup and control: AHlink.

DynamicTalk



Designed to be dropped into the table top



DynamicTalk is an elegant retractable system for gooseneck microphones with exclusive features. It not only makes the microphone disappear within the desk surface but it also provides a pleasant light to indicate its status clearly indicating to the rest of the participants whose microphone is open. Thanks to its protective and patented lighting ring, the microphones can be safely stored and protected making meeting and conference spaces more flexible and versatile.

DynamicTalk provides two different working modes: PA and Conference. When in PA mode, a push button placed on the stainless steel cover plate allows to activate or de-activate the microphone and the LED ring will indicate the status by changing colour from red to green or vice versa. This microphone lifting system automatically silences the microphone when retracting whereas in conference mode the microphone remains active and can be controlled via GPI and GPO.

The cover plate is made of brushed stainless steel with optional integration of different interfaces and with the possibility to have different finishes. DynamicTalk is available in 3 standard sizes: 400 mm, 500 mm, 600 mm (for short, medium and large microphones with XLR, 3 pin connector). Customised versions are also available for several types and sizes of conference microphones and conference brands.

MODEL	DESCRIPTION	MSRP PRICE \$
AHDTLS	Professional retractable system for 3 pin XLR gooseneck microphones with a maximum length of 400 mm (microphone not included). The cover plate is made of brushed stainless steel and provides a rounded microphone coverlid and 3 operation buttons to open/close, mute/unmute and a free GPO button. The lift system includes a translucent plastic rounded ring to centre the microphone during its rise and retract movement from a position hidden below the cover to a top position projected through the cover, avoiding the microphone from touching the cover plate, damaging or blocking when retracting. Compatible with AHlink: a wireless app that allows the system to be adjusted to the exact microphone length, facilitates the unit's serial number, allows the activation and deactivation of the RS-422 termination and allows to change the working mode from PA to Conference. AHlink.	1486
AHDTLM	Professional retractable system for 3 pin XLR gooseneck microphones with a maximum length of 500 mm (microphone not included). The cover plate is made of brushed stainless steel and provides a rounded microphone coverlid and 3 operation buttons to open/close, mute/unmute and a free GPO button. The lift system includes a translucent plastic rounded ring to centre the microphone during its rise and retract movement from a position hidden below the cover to a top position projected through the cover, avoiding the microphone from touching the cover plate, damaging or blocking when retracting. Compatible with AHlink: a wireless app that allows the system to be adjusted to the exact microphone length, facilitates the unit's serial number, allows the activation and deactivation of the RS-422 termination and allows to change the working mode from PA to Conference. AHlink.	1543
AHDTLL	Professional retractable system for 3 pin XLR gooseneck microphones with a maximum length of 600 mm (microphone not included). The cover plate is made of brushed stainless steel and provides a rounded microphone coverlid and 3 operation buttons to open/close, mute/unmute and a free GPO button. The lift system includes a translucent plastic rounded ring to centre the microphone during its rise and retract movement from a position hidden below the cover to a top position projected through the cover, avoiding the microphone from touching the cover plate, damaging or blocking when retracting. Compatible with AHlink: a wireless app that allows the system to be adjusted to the exact microphone length, facilitates the unit's serial number, allows the activation and deactivation of the RS-422 termination and allows to change the working mode from PA to Conference. AHlink.	1583

DynamicTalk

OPTIONS & ACCESSORIES

For custom options, special features and optional accessories, please see below.

AHDTLS	AHDTLM	AHDTLL
ACPT (Min. 5 units) Aluminium cover plate	ACPT (Min. 5 units) Aluminium cover plate	ACPT (Min. 5 units) Aluminium cover plate
CPT (Min.5 units) Painted	CPT (Min.5 units) Painted	CPT (Min.5 units) Painted
CCUSB (Min.5 units) USB passthrough	CCUSB (Min.5 units) USB passthrough	CCUSB (Min.5 units) USB passthrough
CC2USB (Min.5 units) 2 USB passthroughs	CC2USB (Min.5 units) 2 USB passthroughs	CC2USB (Min.5 units) 2 USB passthroughs
CCUSBPower (Min.5 units) USB power	CCUSBPower (Min.5 units) USB power	CCUSBPower (Min.5 units) USB power

Available customisations for conference brands: Audio-Technica, Beyer Dynamic, Bosch, Sennheiser, Shure, Televic, Bhraler, DPA Microphones and others.

MODEL	ACCESSORIES & OPTIONS	MSRP PRICE \$
ACPT	Aluminium cover plate.	400
CPT	Painted.	100
CCUSB	Integrated USB passthrough on the cover plate.	172
CC2USB	2 Integrated USB passthrough on the cover plate.	218
CCUSBPower	Integrated USB power outlet on the cover plate.	206



Patented automated cover plate for veneering /upholstering

Universal lift system for gooseneck XLR 3 pin microphones

360° LED lighting ring to indicate microphone status

PA and Conference working modes

AH-AMMC Auto Mechanical Movement Calibration

Wireless connectivity for setup and control: AHlink.

DynamicTalk UnderCover



DynamicTalk UnderCover is an intelligent solution comprising a lifting system for a gooseneck style microphone. It combines DynamicTalk, with UnderCover, an award winning automated cover. The patented smooth mechanism of the cover allows the DynamicTalk microphone to be neatly concealed beneath the furniture by simply pressing a button. When the microphone is needed the UnderCover plate slides down and disappears into the table. Then the microphone is lifted gently and effortlessly up to a working position and the user can adjust it to get a comfortable angle to speak.

A LED ring at the base of the microphone indicates the speaker's status changing from green to red or vice versa. DynamicTalk UnderCover is available in 3 standard sizes: for gooseneck microphones with a maximum length of 400 mm, 500 mm and 600 mm and can also be customised for different types and sizes of conference microphones and conference brands.

MODEL	DESCRIPTION	MSRP PRICE \$
AHDTLS UC	Professional retractable system for 3 pin XLR gooseneck microphones with a maximum length of 400 mm. (microphone not included). The automated cover is made of coated painted steel and it has been designed for veneering. The lift system includes a translucent plastic rounded ring to centre the microphone during its rise and retract movement from a position hidden below the cover to a raised position. Compatible with AHlink: a wireless app that allows the system to be adjusted to the exact microphone length, facilitates the unit's serial number, allows the activation and deactivation of the RS-422 termination and allows to change the working mode from PA to Conference. AHlink.	2040
AHDTLM UC	Professional retractable system for 3 pin XLR gooseneck microphones with a maximum length of 500 mm. (microphone not included). The automated cover is made of coated painted steel and has been designed for veneering. The lift system includes a translucent plastic rounded ring to centre the microphone during its rise and retract movement from a position hidden below the cover to a raised position. Compatible with AHlink: a wireless app that allows the system to be adjusted to the exact microphone length, facilitates the unit's serial number, allows the activation and deactivation of the RS-422 termination and allows to change the working mode from PA to Conference. AHlink.	2115
AHDTLL UC	Professional retractable system for 3 pin XLR gooseneck microphones with a maximum length of 500 mm. (microphone not included). The automated cover is made of coated painted steel and has been designed for veneering. The lift system includes a translucent plastic rounded ring to centre the microphone during its rise and retract movement from a position hidden below the cover to a raised position. Compatible with AHlink: a wireless app that allows the system to be adjusted to the exact microphone length, facilitates the unit's serial number, allows the activation and deactivation of the RS-422 termination and allows to change the working mode from PA to Conference. AHlink.	2172

DynamicTalk UnderCover

OPTIONS & ACCESSORIES

For custom options, special features and optional accessories, please see below.

AHDTLS UC	AHDTLM UC	AHDTLL UC
CCUSB (Min.5 units) USB passthrough	CCUSB (Min.5 units) USB passthrough	CCUSB (Min.5 units) USB passthrough
CC2USB (Min.5 units) 2 USB passthroughs	CC2USB (Min.5 units) 2 USB passthroughs	CC2USB (Min.5 units) 2 USB passthroughs
CCUSBPower (Min.5 units) USB power	CCUSBPower (Min.5 units) USB power	CCUSBPower (Min.5 units) USB power

MODEL	ACCESSORIES & OPTIONS	MSRP PRICE \$
CCUSB	Integrated USB passthrough.	172
CC2USB	2 Integrated USB passthrough.	218
CCUSBPower	Integrated USB power outlet.	206



Low profile enclosure
 Adapts to 400 mm microphones
 LED (red/green) to indicate microphone's status
 Serial control & Remote Diagnosis
 Maintenance free

DynamicTalkH



DynamicTalkH is a horizontal lift for 400 mm gooseneck microphones. With a low profile enclosure, the system has been especially developed to optimise the space below the table in open table designs. Silent, remotely controllable and elegant, DynamicTalkH is very easy to install. Veneering is also available to match surface finish of the table. This system allows the microphone to be bended while returning automatically to its original horizontal position. DynamicTalkH not only conceals cleverly the microphone within the desk, but it also provides an interior light that goes from red to green to indicate its status. Microphones are stored safely, improving the flexibility of meeting and conference spaces, as tables can be used for different purposes. DynamicTalkH can be remotely controlled and diagnosed through the AHnet protocol (RS-422).

MODEL	DESCRIPTION	MSRP PRICE \$
AHDTHS	Horizontal retractable system for gooseneck microphones with a maximum length of 400 mm (microphone not included).	3715

For custom options, special features and optional accessories, please see below.

AHDTHS
MCTH (Min.5 units) Matte cover plate
UI Underneath installation


Customised versions are also available for several conference brands.

MODEL	ACCESSORIES & OPTIONS	MSRP PRICE \$
MCTH	Matte cover plate.	218
UI	Prepared for underneath installation, to be veneered.	0



Motorised lift for boundary microphone
 Touch control sensor on cover plate raising
 and lowering the microphone
 Wireless connectivity for setup and control:
 AHlink.
 Compact, space optimising and stylish
 solution
 Silent, elegant and durable system
 AHnet control and remote diagnosis
 Easy installation and maintenance free

DynamicTalkB

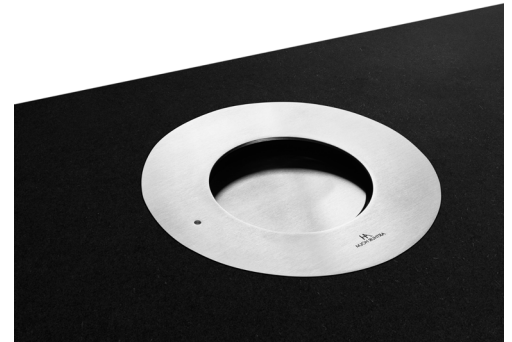

Motorised microphone lift for boundary microphones and similar, controllable through network or directly on the device using the flush mounted touch control sensor. Integrated wireless set-up and diagnosis.

The Arthur Holm DynamicTalkB microphone lift is designed to hide boundary microphones when not in use with a smooth, elegant and silent movement.

MODEL	DESCRIPTION	MSRP PRICE \$
AHDTB	Motorised microphone lift for boundary microphones and similar, controllable through network or directly on the device by a touch control sensor. Wireless set-up and diagnosis (microphone not included). AHlink.	2286

For custom options, special features and optional accessories, please see below.

AHDTB
UI Underneath installation
CPTB Painted



MODEL	ACCESSORIES & OPTIONS	MSRP PRICE \$
UI	Prepared for underneath installation, to be veneered.	0
CPTB	Painted.	92

Easy to install
Maintenance free
No Power required
Universal XLR-3Pin connection
Push Button and LED controlled by third party conference system

MicConnect



Arthur Holm MicConnect is a passive surface shock mount for XLR 3 pin microphones with integrated shock mount, push to talk button and microphone status LED's. The microphone is quickly and easily installed and removed, to remove the microphone a special tool is required (included), when there isn't a microphone installed the integrated round lid will cover the XLR connector. The MicConnect is made out of stainless steel and is available in standard or customised finishes.

Customised versions are also available for several conference brands.

MODEL	DESCRIPTION	MSRP PRICE \$
AHMC	Passive stainless steel microphone surface shock mount for 3 pin XLR microphones (microphone is not included).	743

For custom options, special features and optional accessories, please see below.

AHMC
MCMC Matte cover plate
CPMC Painted



MODEL	ACCESSORIES & OPTIONS	MSRP PRICE \$
MCMC	Matte cover plate.	172
CPMC	Painted.	109

Natural sound direction
 Speech intelligibility
 High gain before feedback
 Close proximity to user
 Limited audio pollution
 360° loudspeaker
 4" 2-Way coaxial speaker, bass reflex
 2 x 36W class-D bi-amplifier integrated
 Acoustic omnidirectional diffuser
 Internal DSP processing
 Balanced line input Phoenix connector
 Wooden speaker enclosure
 RS-422 controllable
 Near field audio reproduction
 Speech intelligibility enhancement
 Remotely controllable
 Wireless connectivity for setup and control AHlink.

DynamicSpeaker



Motorised loudspeaker for desk and furniture integration bringing flexibility and impressive audio quality with enhanced speech intelligibility to the meeting room or other rooms where quality audio is needed in a magical movement.

The compact, omnidirectional 360° active speaker has a twin 36W Class-D integrated amplifiers and a two-way coaxial transducer that brings the audio to the dedicated area with its acoustic diffuser through its integrated DSP technology, the system can be controlled using the AHnet and its wireless AHlink App for control and set-up with optional user interface, for raising and lowering the speaker and volume control.

DynamicSpeaker is an ingenious, elegant and space optimising solution. It comprises a motorized loudspeaker for desk integration: a compact, omnidirectional 360° Class-D active speaker, two-way coaxial driver, with integrated DSP technology. It improves the meeting room acoustics with proximity sound, improves speech intelligibility and helps optimising the table space.

MODEL	DESCRIPTION	MSRP PRICE \$
AHDSR42W	Motorised loudspeaker for furniture integration. 4" coaxial loudspeaker. Class-D 2way bi-amplified. RMS power 2 x 36.5W. 360° dispersion. Balanced analogue audio input. Adjustable gain through AHnet (RS422 Protocol). Mute function through AHnet (RS422 Protocol). Housing made of stainless steel. USB Port for software updates. XLR-4 input. Capacitive touch sensor on cover plate for up and down control. AHlink.	2058

For custom options, special features and optional accessories, please see below.

AHDSR42W
UI Underneath installation
CPSK Painted



MODEL	ACCESSORIES & OPTIONS	MSRP PRICE \$
UI	Prepared for underneath installation, to be veneered.	0
CPSK	Painted.	92

Motorised camera, microphone and speaker for furniture integration

Manual rotation 45° left and right

Stainless steel cover top

HD-SDI camera output

Microphone: analogue line output with terminal block

2 colour controllable LED ring

Serial control and remote diagnose (RS-422, AHNet)

Access to the camera configuration menu through AHlink

Self-powered speaker, Line array type, 4x1"

Process via DSP

Integrated digital amplifier.

Balanced line input, via terminal block connect

Wireless connectivity for setup and control: AHlink

DynamicMCS



DynamicMc is a motorised high-resolution video camera and microphone for furniture integration, available with a HD-SDI or a USB camera and an omnidirectional microphone with 2 audio outputs: balanced analogue via XLR (no phantom required) and USB (plug and play).

The hybrid camera housing is built in steel and composite materials in a black, non-reflective finish. A touch button in the steel cover raises and lowers the camera and microphone. The camera can be turned 45° horizontally to each side (manually). DynamicMC can also be remotely controlled via AHNet (RS-422), GPI or AHlink.

MODEL	DESCRIPTION	MSRP PRICE \$
AHDMCS	Motorised HD-SDI video camera, microphone and loudspeaker. AHlink.	3086



Motorised wall mount for videoconference cameras


Compatible with the most popular videoconference cameras

Cover for veneering

RS-422 and Infrared controllable

Easy to install

DynamicVision

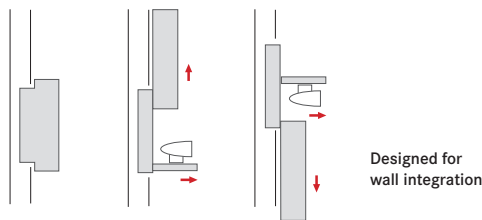

DynamicVision is an efficient motorised solution to hide videoconference cameras and improving the room design. The DynamicVision is designed to be adapted to the room décor. Its fabric mounting system allows an easy mount of the fabric of your choice onsite. The DynamicVision can also be veneered with a maximum veneer load of 2.5kg / 5.5lb. The camera enclosure is controllable through RS-422 (AHnet), GPI and Infrared.

DynamicVision provides the ideal solution to conceal videoconference cameras while improving the interior design of the conference room with its easily adaptable front enclosure that can be covered with various materials. The pre-installation frame is the perfect solution for coordination between system integrators and architects or constructors. The camera enclosure is activated via RS-422, infrared or GPI interface when needed. It neatly stores the camera away when not required, both protecting the camera and securing the work environment. The front enclosure moves vertically to expose the camera while moving the camera moves forward simultaneously to free the camera lines from the enclosure. DynamicVision is the perfect solution for system integrators, architects, interior designers and space planners.

MODEL	DESCRIPTION	MSRP PRICE \$
AHDV01	Motorised camera wall mount enclosure for videoconference cameras. Upward moving cover. Controls: GPI, contact closure, AHnet, RS-422 and Infrared remote control.	1920
AHDV02	Motorised camera wall mount enclosure for videoconference cameras. Downward moving cover. Controls: GPI, contact closure, AHnet, RS-422 and Infrared remote control.	1920



Motorised housing for items
 Can be veneered
 Maintenance free
 Personalised finish
 Control buttons on cover plate
 Easy installation
 Compact, space optimising and elegant solution
 Silent, reliable and durable solution
 Serial control and remote diagnosis
 Wireless connectivity for setup and control.
 AHlink




CourtesyBox



The CourtesyBox is an outstanding motorised solution to hide obstructive objects in the table, keeping the table surface free of obstructive objects such as bottles, glasses, tissues clean, remote controls, papers and lose cables among others.

Expect the unexpected with the CourtesyBox for water and glasses or as a tissue box. If you do not find what you are looking for, contact us and we will adapt the CourtesyBox to your needs. The CourtesyBox can be controlled locally or remotely through AHnet RS422 using CAT5 cables daisy chain between the CourtesyBox's and other Arthur Holm products. The AHlink app gives you wireless access to the setup menu, basic control, serial number and factory settings, making the installation and service of the CourtesyBox and the units connected to the in the chain easy and straight forward, without physically having to touch the ERT The AHlink app is available for Android and iOS.

MODEL	DESCRIPTION	MSRP PRICE \$
AHCBB	Motorised enclosure for bottles and glasses. Brushed stainless steel cover plate with a push button for open and close and Control: AHnet, RS-422, AHlink.	1715
AHCBT	Motorised enclosure for tissues. Brushed stainless steel cover plate with a push button for open and close and Controls: AHnet, RS-422, AHlink.	1943



DynamicCableRetract

Motorised cable retraction solution

Cable length 600 mm

HDMI cable

Minimalistic design

Designed to be discreet

Capacitive sensor to eject and retract the cable

Wireless connectivity for setup and control.

AHlink.



The patented Arthur Holm DynamicCableRetract is a compact robust motorised retractable cable solution that ejects HDMI and USB-C cables by a touch of a button. The system has been designed to blend discreetly with the furniture and to give the user a professional AV solution with a long-life span. The Dynamic retractable cable can be local controlled or remotely through RS-422 or through the AHlink app that gives you wireless access to the setup menu, basic control, serial number and factory settings, making the installation and service of the DynamicCableRetract easy and straight forward, without physically having to touch the DynamicCableRetract. The AHlink app is available for Android and iOS.

MODEL	DESCRIPTION	MSRP PRICE \$
AHDCRHDMI	Motorised cable dispenser including a 600 mm. HDMI cable. The cable ejects or retracts by a push of a button; the controlled movement and tension provide a long cable lifespan. A vertical dispenser head raises up from the table surface and delivers the cable. The dispenser head has a stainless steel sand blasted top plate with a capacitive touch sensor. AHlink.	1715

Motorised solution for AV connectivity and power

Designed to be discreet

Ready to veneer

Custom versions and finishes

Safety system

Wireless connectivity for setup and control.

AHlink.

DynamicConnect



DynamicConnect

DynamicConnect is a motorised retractable connection box that can be customised with different connectors. The ergonomic angle of the product enhances comfort and usability. The design is simple, including a capacitive sensor for the opening and close. It is intuitive and easy to use and to install and integrates a safety mechanism stops the system in case of obstruction. Its ergonomic design enhances comfort and usability.

DynamicConnect offers cable management, improved table space and a neater environment. It offers many finish and AV connectivity options and it can be veneered to match the surface of the table perfectly.

Please contact us.

AHDCB DynamicConnect Bar

The motorised connection bar raises up providing direct access to a variation of connectors, the connection box has a button on the cover plate to raise and lower the connection bar, furthermore, the connection box can be controlled remotely using RS422. The connection bar features a protection system that prevents damage of any connected cables when lowering the unit. This model is available in three sizes and all connectivity is configurable. AHDCB is available in a version for veneering AHDCBV.

Please contact us.

AHDCBV DynamicConnect Bar Veneer

The motorised connection bar is prepared for veneer and underneath installation, the bar raises up, providing direct access to a variation of connectors, the connection box has a touch sensor on the bar itself to raise and lower it, the sensor has adjustable height for levelling to match the veneer thickness furthermore, the connection box can be controlled remotely using RS422. The connection bar features a protection system that prevents damage of any connected cables when lowering the unit. This model is available in three sizes with configurable connectivity.

Please contact us.



Motorised solution for AV connectivity and power

Designed to be discreet

Ready to veneer

Custom versions and finishes

Safety system

Wireless connectivity for setup and control.


AHlink.

DynamicConnect

AHDCH Connect With Motorised Hatch

The Arthur Holm cable cubby with a motorised hatch that slides down behind the connectors to gain free access to connectors. The connection box has a button on the cover plate to raise and lower the connection bar, furthermore, the hatch can be controlled remotely using RS422 and AHlink. This model is available in three sizes and all connectivity is configurable. AHCH is available in a version for veneering AHC VH.

Please contact us.

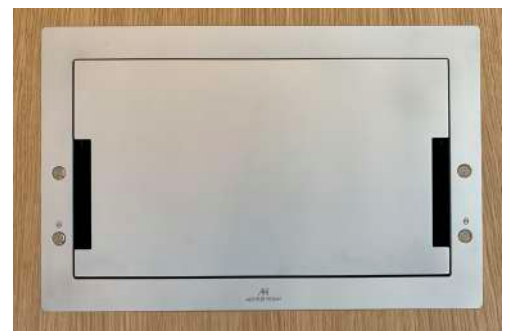

AHDCHV Connect With Motorised Hatch Veneer

The Arthur Holm cable cubby with a motorised hatch that slides down behind the connectors to gain free access to connectors. The hatch can be controlled remotely using RS422 and AHlink. This model is available in three sizes with configurable connectivity.

This model is available in three sizes and all connectivity is configurable.

Please contact us.

ConnectionBox

Manual solution for AV connectivity and power

Multi configurable connections

Designed for veneer and table matching

Flush integration

Straight-forward desk top and underneath installation

Standard and customised housing

Mix and match connectivity



Arthur Holm Connect, The Arthur Holm cable cubby solutions have been designed to blend discreetly with the furniture and to give the user a professional AV solution with a long-life span. The Arthur Holm cable cubby solution is available as a standard product with mix and match connectivity, power and control or as a veneer version that is prepared for the veneering to match the furniture 100% and a seamless integration. The veneer versions have been designed and prepared for veneer, making the mounting of the veneer uncomplicated and easily done onsite without special requirements.

The Arthur Holm cable cubby system have been designed for system integrators, table manufactures and designers who want to go one step further for the perfection of integration with an actual and lifelong design that fulfils all the technical aspects for modern and future connectivity and controls.

- Mix and match connectivity.
- Straight forward underneath or up-desk installation.
- Factory colour option.

The Arthur Holm Connect program ranges from manual to motorised cable cubbies in standard version ready to install or as a veneer version, which can be veneered with the material of your choice.

Manual solution for AV connectivity and power

Designed to be discreet

Ready to veneer

Custom versions and finishes

ConnectionBox



AHCH Arthur Holm Connect Hatch

Arthur Holm's manual connection box is manual opening connectivity solution that allows users to connect their devices in a discreet and streamlined way.

The Arthur Holm basic cable cubby with a manual hatch that manually slides down behind the connectors to gain free access to connectors. This model is available in three sizes and all connectivity is configurable. AHCH is available in a version for veneering AHCHV.

Please contact us.



AHC2H Arthur Holm Connect 2 Hatch

The Arthur Holm 2-hatch cable cubby with a manual 2-hatch system allows in an elegant way to connect smaller and larger power supplies and leaving a minimum gap for cables and power supply. Pushing down the narrow hatch the wide hatch moves up in a synchronised movement providing free access to connectors, after connecting, the two hatches close softly around the cables without marking the cables. The inclined connectors make access to connectors easy and guide any liquid away from connectors in case of a spill and make the AHC2 housing compact under the table. This model is available in three sizes and all connectivity is configurable. AHC2 is available in a version for veneering AHC2V.

Please contact us.

AHC2HV Arthur Holm Connect 2 Hatch Veneer

The Arthur Holm 2-hatch cable cubby with a manual 2-hatch system ready to be veneered for matching table surfaces allows in an elegant way to connect smaller and larger power supplies and leaving a minimum gap for cables and power supply. Pushing down the narrow hatch the wide hatch moves up in a synchronised movement providing free access to connectors, after connecting, the two hatches close softly around the cables without marking the cables. The inclined connectors make access to connectors easy and guide any liquid away from connectors in case of a spill and make the AHC2 housing compact under the table. This model is available in three sizes and all connectivity is configurable. AHC2 is available in the version for veneering AHC2V.

Please contact us.



IP to RS422/RS485 Interface

ERT-60: 2 x AHnet Port for up to 60 units

ERT-30: 1 x AHnet Port for up to 30 units

OTAS (One Touch Addressing System)

RDM system (Remote Diagnostic and Maintenance)

Remote/local control and management

Wireless connectivity for setup and control.

AHlink.

ERT-30 ERT-60



The ERT interfaces provide an easy and convenient setup to control and diagnose motorised monitors, microphone lifts and other automated solutions from Arthur Holm. The ERT interfaces help to reduce the installation time and costs. They facilitate a quicker installation and eliminate the need of third party relay boxes and extra power outlets. Furthermore, the ERT interfaces make the onsite factory support uncomplicated as long as there is an Internet connection available.

The AHlink app gives you wireless access to the ERT setup menu, basic control, serial number and factory settings, making the installation and service of the ERT and the units connected to the ERT easy and straight forward, without having physically having to touch the ERT. The AHlink app is available for Android and iOS.

MODEL	DESCRIPTION	MSRP PRICE \$
ERT-30	IP to RS-422 interface to control, configure and diagnose ARTHUR HOLM motorised products. 1 AHnet port (RS422/ RS485) to control up to 30 units. Ethernet RJ45. OTAS (One Touch Addressing System). Remote/local control and management. RDM system (Remote Diagnostic and Maintenance). Wireless control through AHlink app.	858
ERT-60	IP to RS-422 interface to control, configure and diagnose ARTHUR HOLM motorised products. 2 AHnet ports (RS422/RS485) to control up to 60 units. Ethernet RJ45. OTAS (One Touch Addressing System). Remote/local control and management. RDM system (Remote Diagnostic and Maintenance). Wireless control through AHlink app.	1600



Plug and play solution
 Software free
 High security
 No video compression (no latency)
 3/ HDMI Inputs, 1/HDMI Output
 Dedicated ports for Loop In and Loop Out
 HDCP compliant
 Ethernet external control
 Digital audio Output
 (AHDSSA)
 Easy cabling and installation
 Allows the daisy chain of up to 20 devices (Full HD)

DynamicShare



DynamicShare is a solution that allows each participant to share video material from each monitor connecting a HDMI cable to their devices and distribute a video signal through a HDMI loop.

DynamicShare is a smart solution that allows meeting room participants to share different video sources among each other with an optimal video quality (zero frame latency) and it doesn't require a specific training, technical knowledge or assistance.


It is a software free share system that provides quick and seamless connectivity with a high level of security. The meeting or conference table can stand alone, without the inconvenience of either messy cabling or having to integrate external devices.

DynamicShare is a solution to optimise the cabling and the installation inside a conference or meeting table, allowing the signal to be distributed and shared through an HDMI daisy chain connection topology. It is available in 2 versions: DynamicShare embedded in the monitor for signal distribution, selection and control or as a stand-alone device for third party monitors and video display solutions.


DYNAMICSHARE EMBEDDED SOLUTION

MODEL	DESCRIPTION	MSRP PRICE \$
AHDSS	DynamicShare integrated into Arthur Holm's motorised monitors allowing the daisy chain of the HDMI signal, the share, the input selection and the control in a closed loop of 20 units maximum at Full HD resolution. It includes the buttons on the monitor's cover plate.	686
AHISBD2	Retractable 600 mm HDMI cable integrated into D2 family cover plate.	915
AHISBD3	Retractable 600 mm HDMI cable integrated into D3 family cover plate.	1086
AHHC	HDMI connector integrated in the cover plate.	160
AHDSPB	Priority button integrated in the cover plate.	52
AHBTEK	Kit of transmitter and receiver to extend the HDMI connection above 5 meters.	515

DynamicShare example ON

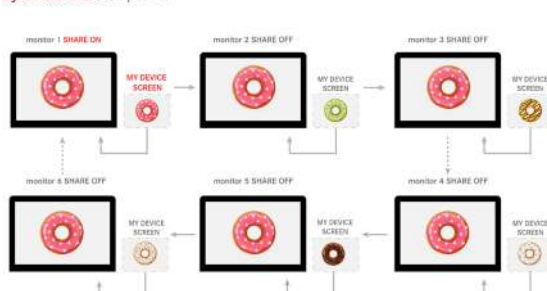

DynamicShare example ON

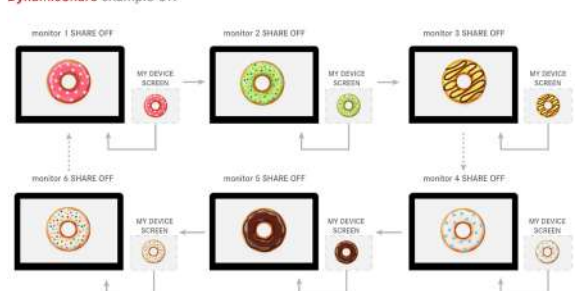

Stand-alone DynamicShare box
Software free
High security
No video compression (no latency)
3/ HDMI Inputs, 1/HDMI Output
Dedicated ports for Loop In and Loop Out
HDCP compliant
Ethernet external control
Digital audio Output
Easy cabling and installation
Allows the daisy chain of up to 20 devices (Full HD)

DynamicShare

Stand-alone



Stand-alone box to be used with Arthur Holm and Albiral monitors as well as third party monitors, projectors or signal distribution.

MODEL	DESCRIPTION	MSRP PRICE \$
AHDSSA	External box to allow the connection of third party monitors, projectors or video wall systems in a DynamicShare configuration. 3 / HDMI Inputs, 1 / HDMI Output, dedicated ports for Loop In and Loop Out, HDCP compliant, Ethernet external control, Digital audio Output.	703
AHBTEK	Kit of transmitter and receiver to extend the HDMI connection above 5 meters.	515
AHSACB	External box comprising buttons for input selection and sharing.	275
AHSACBP	External box comprising buttons for input selection, sharing and priority.	320

Plug and play solution
 Software free
 High security
 No video compression (no latency)
 3/ HDMI Inputs, 1/HDMI Output
 Dedicated ports for Loop In and Loop Out
 HDCP compliant
 Ethernet external control
 Digital audio Output
 (AHDSSA)
 Easy cabling and installation
 Allows the daisy chain of up to 20 devices (Full HD)

DynamicLoop




DYNAMICLOOP EMBEDDED SOLUTION

The DynamicLoop system can manage the distribution of a video signal and allows to daisy chain the monitors in a loop using HDMI cables.

MODEL	DESCRIPTION	MSRP PRICE \$
AHDL	DynamicLoop integrated into Arthur Holm's motorised monitors allowing the daisy chain of the HDMI signal of 20 units maximum at Full HD resolution.	503
AHHRC	Input selection button integrated in the cover plate.	115

DynamicLoop example

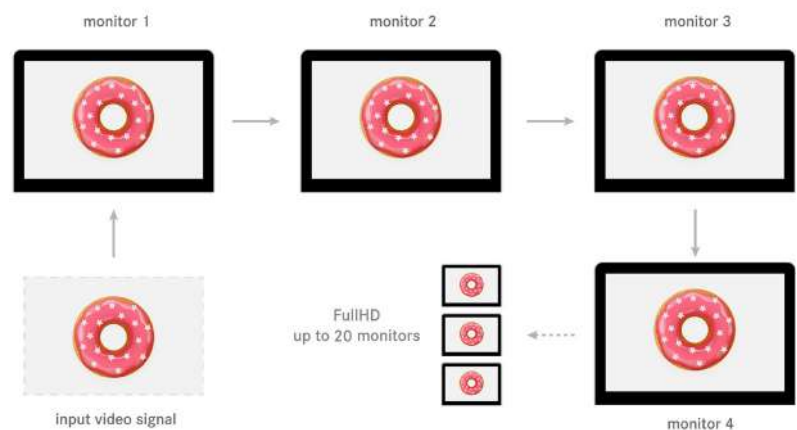

Easy Cabling

Cost effective

Reliable


Daisy Chain video and control signal

No latency

DynamicLoop

Stand-alone

DynamicLoop example

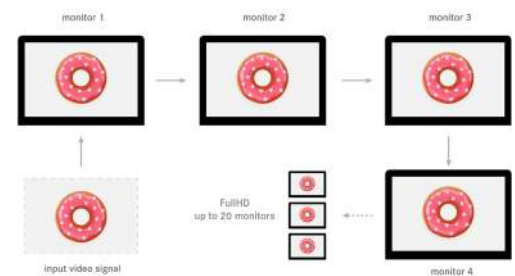

The DynamicLoop stand-alone box is designed for distribution of video signal and allows to daisy chain the monitors in a loop using HDMI cables.

The DynamicLoop system can manage the distribution of a video signal and allows to daisy chain the monitors in a loop using HDMI cables. The DynamicLoop stand-alone is designed for monitor or projector with an HDMI input making the cabling and installation straight forward.

MODEL	DESCRIPTION	MSRP PRICE \$
AHDLA	External box to allow the connection of third party monitors, projectors or Video wall systems in a daisy-chain configuration. 3/ HDMI Inputs, 1/HDMI Output, dedicated ports for Loop In and Loop Out, HDCP compliant, Ethernet external control, Digital audio Output.	629
AHSACBL	External box comprising buttons for Loop Input selection.	275



ARTHUR HOLM

ALBIRAL DISPLAY SOLUTIONS SL

Barcelona – Paris – Madrid – Milan

Headquarters

C/Fátima, 25
Sant Hipòlit de Voltregà
08512 Barcelona – SPAIN
tel. + 34 938 502 376 / 383
fax: + 34 938 502 550
email: marketing@arthurholm.com
web: www.arthurholm.com

Barcelona

C/Prats de Molló, 13
08021 Barcelona – SPAIN
tel. + 34 935 324 424
fax: + 34 938 502 550

Madrid

C/Vázquez de Mella, 23
28017 Madrid – SPAIN
tel. + 34 913 681 190
fax: + 34 913 681 197

Paris

11 Rue du Commandant Jean Duhail
94120 Fontenay Sous Bois – FRANCE
tel. + 33 777 922 364

Milan

Viale Giovanni Suzzani 96/98
20162 Milano – ITALY

U.S.A

29 Poplar Drive,
Stirling NJ, 07980
(908) 604-9360

Follow us!

We encourage you to join our BLOG



www.twitter.com/ArthurHolm1
www.facebook.com/arthurholmscreens
www.linkedin.com/company/arthur-holm
www.vimeo.com/arthurholm
www.instagram.com/arthur_holm/
www.youtube.com/user/arthurholm1

Valid until 31/12/2021

Arthur Holm is a registered brand of Albiral Display Solutions.
Specifications subject to changes without previous notice.
All prices are recommended final consumer prices; taxes and transport are not included.
INCOTERM: EXW Sant Hipòlit de Voltregà, Barcelona, Spain.
Albiral Display Solutions reserves the right to modify both technical and mechanical specifications without previous notice or to discontinue the manufacturing of a product.
All products are designed and manufactured in Europe.

www.arthurholm.com

**Albiral
Display
Solutions**